




VIHTAVUORI

Reloading Guide for Centerfire Cartridges

2017

The Power of Accuracy

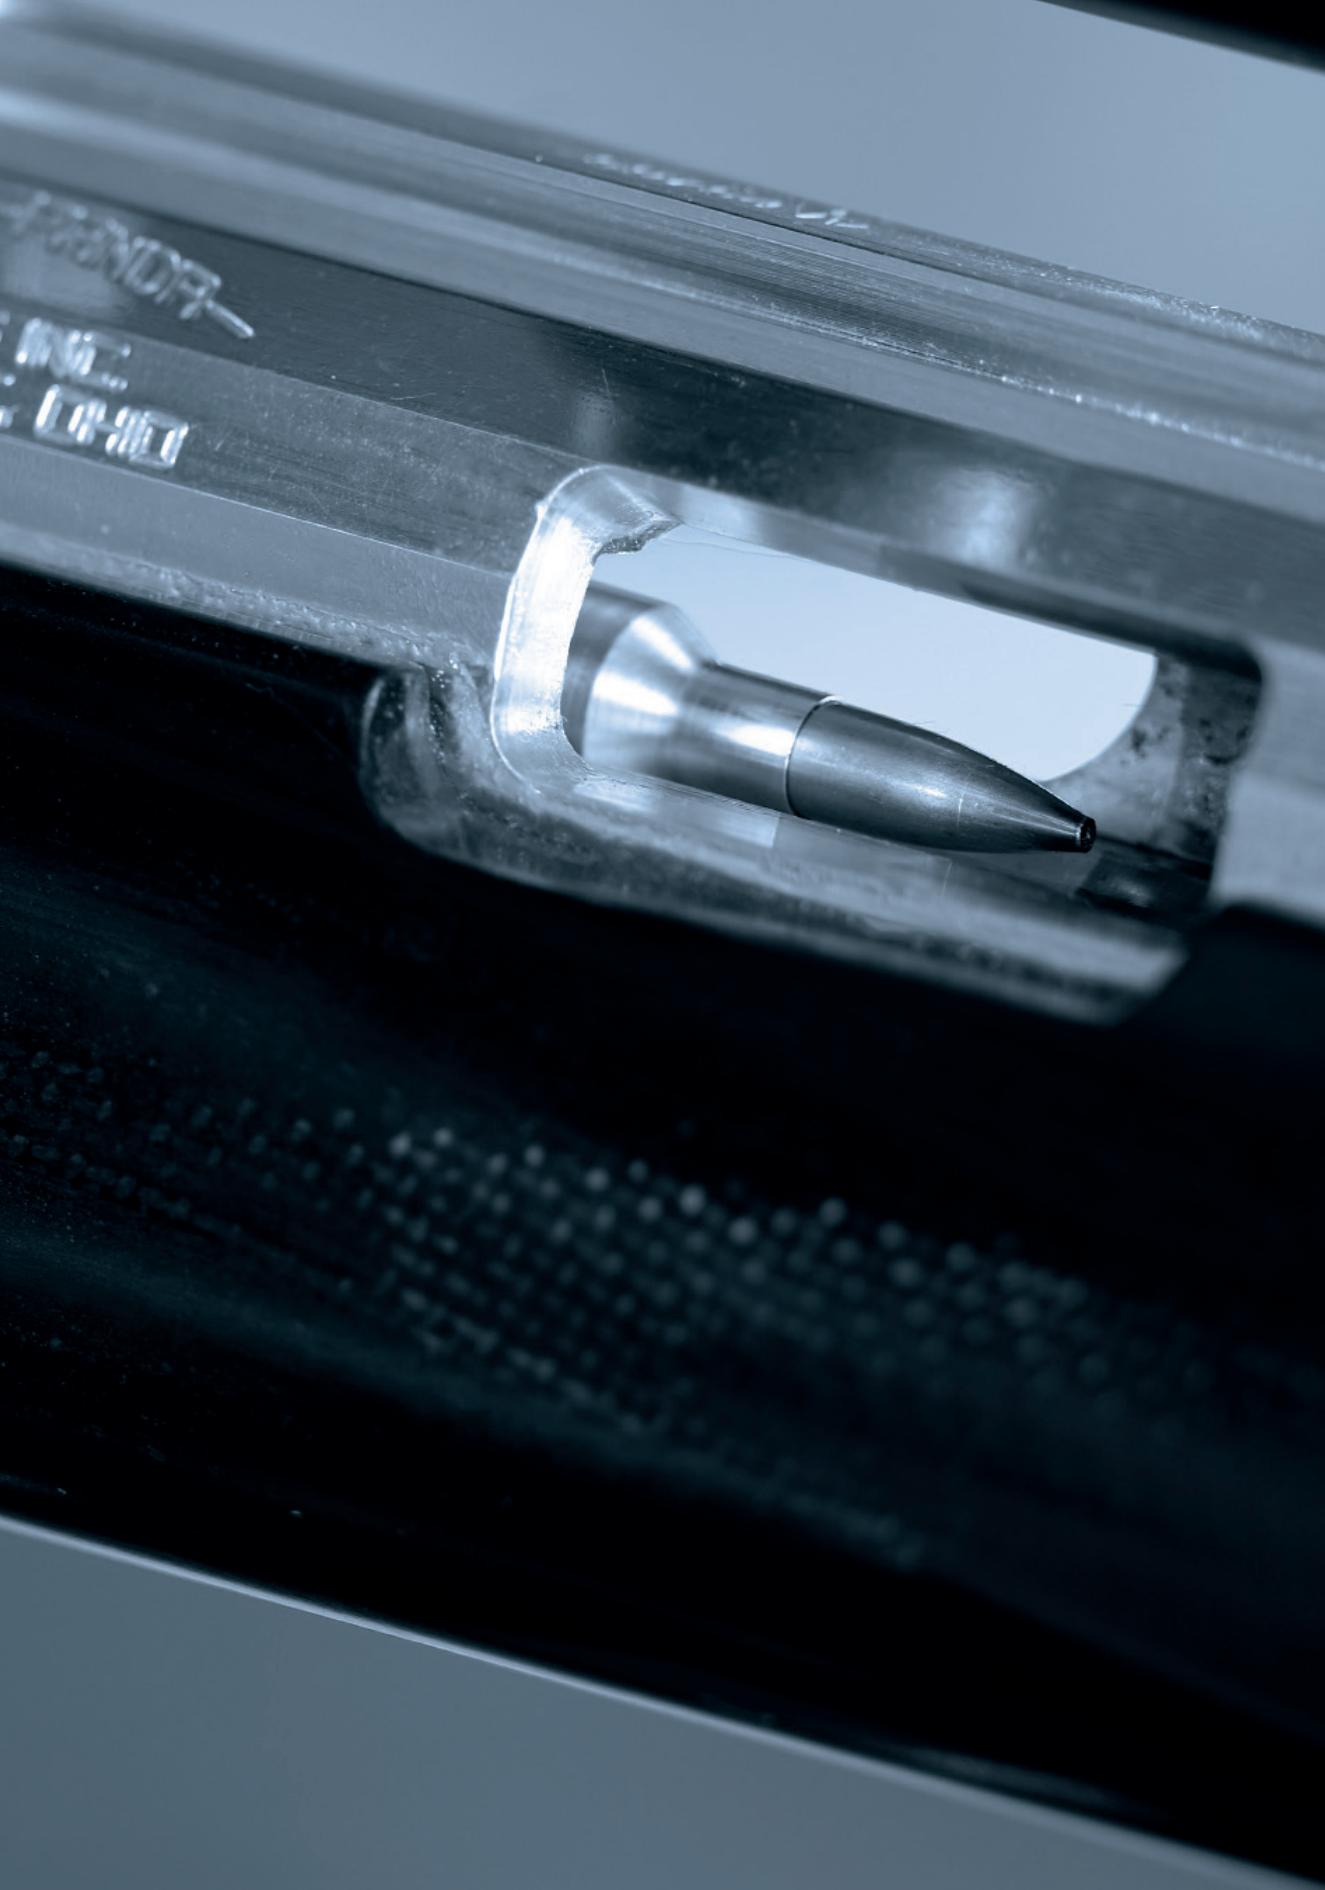

The Power of Accuracy

For almost a hundred years, Vihtavuori powders have formed the heart of many of the world's most renowned cartridges. Reloaders know they can trust in Vihtavuori powder's performance and uniform high quality - cartridge after cartridge - to create a perfect product for successful shooting. When choosing Vihtavuori powders you know your ammo is up to the task, even in the toughest conditions.

Go ahead, take Vihtavuori and make the perfect shot.

Premium N100 Powders

The N100 series powders are primarily rifle powders with different burning rates to optimize your loads.

N110

The fastest burning rifle powder from Vihtavuori. Similar to Hodgdon H110 and Winchester 296. N110 can be used in small rifle cases like .22 Hornet and .30 Carbine but also in magnum pistol and revolver cartridges like .357 S&W Magnum, .41 Magnum, .44 Magnum, .454 Casull and .500 S&W.

N120

Slower burning powder for small capacity rifle cases and for lighter bullets in many .22 caliber loads. N120 needs higher pressure than N110 in order to optimize burning. Burning rate is near to Accurate 1680, IMR 4198 and Reloder 7. N120 is suitable also for 7,62x39, .30-30 Winchester and .444 Marlin.

N130

This powder is used in many factory loaded caliber .22 and 6 mm PPC cartridges. Suitable also for lighter bullets in caliber .223 Remington and for straight-wall rifle cases like .45-70 Government and .458 Winchester Magnum. Burning rate is close to Hodgdon H322 and Accurate 2230.

N133

A choice of many bench rest and standard rifle shooters who are using 6 mm PPC. Used also in many loads of .222 Remington, .223 Remington and as well in other applications where a relatively fast burning powder is needed, like in .45-70 Government. Similarly burning powders are Norma 201, Hodgdon H335 and Vectan SP10.

N135

An excellent powder for .308 Winchester loads with bullet weight less than 10 grams (155 grains). It will fit applications similar to IMR4064, Hodgdon H4895 or Accurate 2520. Capability for various loads ranging from .222 Remington to .458 Winchester Magnum.

N140

A true multipurpose powder, which can usually be used in place of IMR4320, Reloder 15 or Hodgdon H380. Good choice also for .223 Remington, .22-250 Remington, .308 Winchester, .30-06 Springfield, 8x57 IS (8 mm Mauser) and .375 H&H Magnum.

N150

This powder burns a bit slower than N140 and works as well as Hodgdon H414 and Winchester 760. Typically used with heavier bullets in accuracy and hunting loads of cartridges with middle case volumes, like .308 Winchester, 6,5x55 SE and .30-06 Springfield.

N160

A slow burning powder for Magnum cartridges and calibers with large case volume and comparatively small bullet diameter. Burning speed of N160 is close to Reloder 19, Winchester WMR and the various 4831's. For example some ideal applications are: .243 Winchester, 6,5-.284 Norma, 7 mm Weatherby Magnum, .300 Winchester Magnum, .338 Winchester Magnum and all the Winchester Short Magnums.

N165

A very slow burning powder for Magnum cartridges with heavy bullets. N165 offers performance equal to Norma MRP and Reloder 22. To be used with heavy bullets in calibers ranging from 6,5x55 SE all the way to .416 Rigby.

N170

The slowest burning N100 series rifle powder from Vihtavuori and one of the slowest canister reloading powders generally available from any manufacturer. It will fit applications similar to Hodgdon H1000 and Accurate 8700. Good performances in most of the belted Magnum cartridges like .300 Weatherby Magnum and suitable also for .300 Remington Ultra Magnum and .338 Lapua Magnum.

Premium N300 Handgun Powders

The N300 series powders are ideal for handgun and shotgun loads.

N310

Very fast burning and competitive with Alliant Bullseye, Hodgdon HP38 and Vectan Ba 10. It has applications in a very wide range from .32 S&W Long Wadcutter up to .45 ACP.

N320

A comparatively fast burning multipurpose handgun powder with burning rate about the same as Winchester 231 or Alliant Red Dot. Currently available reloading data for 9 mm Luger, .38 Super Auto, .38 Special, .357 Magnum, .40 S&W, .44 S&W Special, .44 Remington Magnum, .45 ACP and .45 Colt.

Tin Star (N32C)

Special powder developed for Cowboy Action Shooters shooting lead bullets with revolvers and rifles. It has low bulk density (less free space in the case) and it burns very clean without residues with a burning rate between N320 and N330. Reloading data is currently available for .38 Special and .44 Magnum.

N330

Burning rate is a bit slower than with N320 and corresponding to Alliant Unique and Vectan Ba 9. Especially designed for 9 mm Luger but also suitable for .38 Special, .40 S&W, .44 S&W Special and .45 (Long) Colt.

N340

An excellent multipurpose handgun powder with burning rate generally about like Accurate No.5 or Alliant Herco. Wide application area covers the following handgun cartridges: 9 mm Luger, 9x21 mm, .357 SIG, .38 Super Auto, .38 Special, .357 Magnum, .40 S&W, 10 mm AUTO, .44 S&W Special, .44 Remington Magnum, .45 ACP and .45 Colt.

N350

This is the slowest burning N300 series handgun powder, which can usually be used instead of Accurate No.7, IMR Hi-Skor 800-X and Alliant Blue Dot. Appropriate choice for many powerful handgun loads, for example in calibers 9 mm Luger, 10 mm AUTO and .45 ACP.

3N37

Originally developed for .22 rimfire cartridges but has proven to be very versatile and desirable within all competitive handgun shooting disciplines. The burning speed of this small grain powder is near to N350 and Vectan A0. Reloading data available for all popular handgun cartridges.

3N38

This specially designed powder for competitive handgun shooting is recommended for high velocity loads of 9 mm Luger and .40 S&W with moderate bullet weight. Burning rate is corresponding to Vectan SP 2.

N105 Super Magnum

Slow burning handgun powder filling the gap between N350 and N110. Especially developed for handgun cartridges with heavy bullets and/or large case volume. Reloading data is currently available for the following cartridges: 9x21 mm, .38 Super Auto, .357 Magnum, 357 Remington Maximum, .40 S&W, 10 mm AUTO, .41 Remington Magnum, .44 Remington Magnum, .45 Colt, .45 Winchester Magnum and .454 Casull.

Premium N500 High Energy Powders

The N500 series of Vihtavuori propellants provide the utmost in performance for added velocity and range with heavy bullets. Nitroglycerine has been added to the traditional single base powder to get better energy content. The series offers five different reloading powders with different burning rates.

N530

This is the fastest burning powder in the N500 series and its burning rate is close to Vihtavuori N135 and Hodgdon BL-C(2). Developed especially for the 5,56 mm NATO-cartridges and it gives excellent performances in many .45-70 Government loads and also in .308 Winchester loads with bullet weight less than 10 grams (155 grains). Qualified STANAG 4170.

N540

Faster burning powder with a burning rate like with N140 and close to Hodgdon H414 and Winchester 760. To situations where more power is needed, especially for .223 Remington, .308 Winchester and .30-06 Springfield loads with heavier bullets. Qualified STANAG 4170.

N550

Burning rate is like with N150 and close to IMR 4350 and Reloder 19. Good choice for more powerful loads for 6,5x55 SE, .308 Winchester, .30-06 Springfield and for many others.

N560

Burning rate is between N160 and N165 and close to Norma MRP and Reloder 22. Powder especially for Magnum cartridges to get out the best power for example from .270 Winchester, 7 mm Remington Magnum, 7 mm Weatherby Magnum, .300 Winchester Magnum, .300 Weatherby Magnum and .338 Lapua Magnum.

N570

This is the newest member of the N500 series powders and also the slowest burning. The burning rate of N570 is near to N170 and it is faster burning than 24N41. The characteristics of this high energy powder with large grain size bring out the best in most of the large volume cases like for example in 6,5-.284 Norma, .300 Winchester Magnum, .300 Remington Ultra Magnum, .338 Lapua Magnum and .30-378 Weatherby Magnum.

Powders for the .50 BMG

24N41 / 20N29

For .50 BMG there are two special Vihtavuori reloading powders available: 24N41 and 20N29. They are, like N100 series, single base surface treated powders. Their burning rate is slower and grain size larger than that of the N100 series rifle reloading powders. The renewed relative burning rate of the 24N41 is 39 and that of the 20N29 respectively 36, when N110 is given the index 100, and therefore 24N41 is slightly faster burning than 20N29. There is reloading data available also for some other magnum rifle calibers with these powders and 20N29 has gained reputation also when used eg. in .338 Lapua Magnum and in .30-378 Weatherby Magnum.

Reloading Guide 2017 for Centerfire Cartridges



VIHTAVUORI

Table of Contents

THE POWER OF ACCURACY.....	3
N100 Series.....	4-5
N300 Series.....	6-7
N500 Series.....	8-9
PREFACE.....	11
ABOUT THE DATA.....	12
Disclaimer	12
How to Use the Data	12
Pressure	12
PROPERTIES AND STORAGE OF SMOKELESS POWDER	13
Properties of Smokeless Powder	13
How to Check Smokeless Powder for Deterioration.....	14
Considerations for Storage of Smokeless Powder	14
Recommendations for Storage of Smokeless Powder	15
RELOADING SAFETY	16-17
RIFLE RELOADING DATA	18
Disclaimer	18
.204 Ruger	18
.22 Hornet.....	18
.221 Remington Fireball	18-19
.222 Remington	19
.223 Remington	19-21
.223 WSSM.....	21
.22 PPC-USA.....	21
.22-250 Remington	21-22
6 mm PPC-USA	22
6 mm BR Norma.....	22-23
.243 WSSM	23
.243 Winchester	23-24
6 XC	24
6 mm Remington.....	24-25
.240 Weatherby Magnum	25
.25-06 Remington	25
6,5 mm Grendel	26
6,5 x 47 Lapua	26-27
6,5 Creedmoor.....	27-28
.260 Remington.....	28-29
6,5 x 55 Swedish Mauser.....	29-31
6,5 x 55 Swedish Mauser/SKAN	31-32
6,5 -284 Norma	32-33
.270 WSM	33
.270 Winchester	34
.270 Weatherby Magnum	34
7 mm - 08 Remington.....	34
7 x 57	35
7 x 57R	35
7 x 64	36-37
7 mm WSM	37
7 mm Remington Magnum	37-38
7 mm Weatherby Magnum.....	38
7 mm RUM.....	38-39
.30 Carbine	39
.300 AAC Blackout.....	39
.30-30 Winchester	39
.300 Savage	40
.308 Winchester	40-42
7,62 x 53R (7,62 Russian)	42-43
7,5 x 55 Swiss GP31.....	44
.30-06 Springfield.....	44-45
.300 H&H Magnum	46
.300 WSM	46
.300 Winchester Magnum.....	47-48
.300 Weatherby Magnum	48
.300 Lapua Magnum	48
.300 Remington Ultra Magnum.....	49
.30-.378 Weatherby Magnum	49
7,62 x 39	50
.303 British	50
8 x 57 IS (8 mm Mauser)	50-51
8 x 57 IRS.....	51
.338 Winchester Magnum.....	51-52
.338 Lapua Magnum	52
9,3 x 62	53
9,3 x 66 Sako	53
9,3 x 74R	54
.375 H&H Magnum	54
.416 Rigby.....	55
.444 Marlin	55
.45-70 Government	55
.458 Winchester Magnum	56
.50 Browning	56

HANDGUN RELOADING DATA

Disclaimer	57
7 mm TCU	57
7 mm BR Remington.....	57-58
7 mm GJW	58
7,62 x 25 Tokarev.....	58
.32 S&W Long N.P.....	58
.32 S&W Long Wadcutter.....	59
9 mm Luger.....	59-60
9 x 21	60
9 x 23 Winchester.....	61
.357 SIG.....	61
.38 Super Auto	61-62
.38 Special	62-63
.357 Magnum	63-64
.357 Remington Maximum	64
.40 S&W.....	64-65
10 mm AUTO	65
.41 Remington Magnum	65
.44 S&W Special	66
.44 Remington Magnum	66-67
.45 ACP	67
.45 Colt	68
.45 Winchester Magnum	68
.454 Casull.....	68-69
.50 AE	69
.500 S&W Magnum	69

VIHTAVUORI SMOKELESS LOADS FOR COWBOY ACTION SHOOTING.....

.38 Special	71
.357 Magnum	71
.44 S&W Special	71
.44 Remington Magnum	71
.45 Colt	71
Personal Loads	72-73
Quality by Design	74-75
Package info	76-77

BURNING RATE CHART

VIHTAVUORI WORLDWIDE DISTRIBUTORS	79
---	----

Preface

Dear Vihtavuori customer,

The new Vihtavuori Reloading Guide 2017 is an updated version of the previous Vihtavuori Reloading Guides. The contents of this updated issue has been revised with loading data for the following calibres:

Centerfire rifle

6.5x47 Lapua, 6.5 Creedmoor, .260 Rem., 6.5x55 SE, 6.5-284 Norma, 7-08 Rem., 7x64, 7 mm Rem Mag., .308 Win., 7.62x53R, .30-06, .300 WSM, .300 Win Mag., 8x57 IRS, 8x57 IS, 9.3x62, 9.3x74R

The now published new rifle reloading data is expanding and revising the powder selection for existing bullets but also for some new Naturalis bullets.

As a courtesy to the reloader the load tables contain notes of compressed loads and loads to fill the case up. For flexible usage this guide features data in metric and imperial dimension systems i.e. charge weight in grams and grains as well as muzzle velocity in meters and feet per second. This reloading guide also includes the accuracy loads noted in the load tables. These loads utilize worldwide well-known Lapua cartridge components and are factory tested either for even pressure / muzzle velocity and accuracy. These loads are highlighted in the load tables with dark grey shadowing.

All the loads in this guide are pressure tested according to the C.I.P. method. The maximum loads given in the tables are determined according to the C.I.P. and SAAMI maximum pressure specifications. The listed maximum loads should never be exceeded. Due to the differences in the cartridge components, individual weapons, shooting temperatures etc., always start developing your load by using the starting load according to the loading data. If there is no indication of the starting load, use 15 % lower charge than the listed maximum load as your starting load.

The Vihtavuori powders are manufactured by Nammo Vihtavuori Oy at the Vihtavuori plants. Sales and marketing of the reloading powders as well as customer service are carried out by Nammo Lapua Oy. The contact details of Lapua customer service and a listing of Vihtavuori Distributors can be found at the end of this guide. For latest updates of data and distributors check also www.vihtavuori.com, where this guide can also be downloaded in PDF format. Check also Apple App Store and Google Play store for the Vihtavuori RELOAD mobile app! Latest reloading information and the possibility to save your own reloading recipes, at hand everywhere you go.

We wish you successful reloading with Vihtavuori powders.



VIHTAVUORI

About the Data

Disclaimer

As Nammo Lapua Oy has no control over improper storage, handling, loading or use of our powders after they have left the factory, we make no warranty of any kind, either expressed or implied, limited or full. We specifically disclaim all warranties of fitness for a particular purpose and merchantability. We specifically disclaim all liability for consequential damages of any kind whatsoever, whether or not due to seller's negligence or based on strict product liability or principle of indemnity or contribution, Nammo Lapua Oy neither assumes nor authorizes any person to assume for it any liability in connection with the use of this product.

How to Use the Data

Our rifle and handgun data listings generally contain maximum charges which are not to be exceeded. In some instances starting loads are also listed. Currently this booklet contains all of the data we can supply. Be certain you use the correct data and the specific bullet weight shown.

By staying 5 % below the maximum powder charge weight, pressures will be reduced by about 10 % while velocities will be only about 3 % lower than listed.

Caution: When loading handgun cartridges it is vital to maintain the minimum cartridge overall length (C.O.L.) listed in the tables. Shorter overall lengths may double chamber pressures. Longer lengths are permissible so long as the functioning of the handgun will not be impaired.

The data in the loading tables were obtained at an ambient temperature of 68 degrees Fahrenheit and relative humidity of 55 %. The values obtained were under carefully controlled conditions and may vary from those obtained with your firearm, specific component lots, loading dimensions, and loading procedures. The maximum charges must NEVER be exceeded. **Start loading with the starting load according to the loading data. If there is no indication of the starting load, use 15 % lower charge than the listed maximum.** When loading cartridges for which the listed charge is 10 grains or less, after firing 10 rounds at the minimum weight (15 % below maximum), increase charge weights by 0.2 grains and fire another 10 rounds. Repeat this procedure, if necessary, until you reach, but do not exceed,

the maximum listed charge. The same process is followed for heavier charges except that charge weights from 11 to 25 grains use increments of 0.5 grains. For charges over 25 grains increments of 1.0 grains will be correct.

If even a single test round shows signs of excessive pressure discontinue the use of the load. Do not fire even a single additional cartridge. Seek qualified help before proceeding! The traditional sign of overpressure is a flattened primer. When flattened primers start to occur, it is a definite warning that the charge should be reduced, quickly. Brass getting into the ejector and extractor cavities is a worse case. Blown out primers are worse still. If a case ruptures it may be a sign of a defective case or a truly lethal chamber pressure.

In case of overpressure signs it is wiser to back off, to be safe rather than sorry. Why risk potentially fatal injury? Better to stop shooting and immediately discard all such reloads.

Read also the Reloading Safety Rules on pages 16 and 17.

Pressure

There are numerous factors which can change the ballistic performance of a load even when the data is followed exactly. For example: The internal dimensions of a firearm can vary greatly even between two of the same make and model. Pressures can vary to extremes as different firearms are used. Each change in brand and even within different lots of a specific brand component can cause notable ballistic changes. Too, changes in ambient temperature can also cause ballistic altering pressures. Not every bullet of a given diameter and weight will produce alike pressure. Changes in case brand can also effect ballistics. There are numerous other causes of varying pressure levels.

Therefore it is essential that the reloader be well versed in the methods of carefully working up a reload powder charge in small increments as outlined in the various reloading handbooks that are available from reliable sources. The data in this book is not intended for use by persons not thoroughly versed in such procedures.

This guide should be supplemented by a good reloading handbook such as the Lapua Reloading Manual, the DBI Metallic Cartridge Reloading, the Vihtavuori Reloading Manual or other recognized manuals that may offer all appropriate information.

Properties and Storage of Smokeless Powder

Properties of Smokeless Powder

Smokeless powders, or propellants, are essentially mixtures of chemicals designed to burn under controlled conditions at the proper rate to propel a projectile from a gun.

Smokeless powders are made in three forms:

1. Thin, circular flakes or wafers
2. Small cylinders
3. Small spheres

Single-base smokeless powders derive their main source of energy from nitrocellulose.

The energy released from double-base smokeless powders is derived from both nitrocellulose and nitroglycerine.

All smokeless powders are extremely flammable by design, they are intended to burn rapidly and vigorously when ignited.

Oxygen from the air is not necessary for the combustion of smokeless powders since they contain sufficient built-in oxygen to burn completely, even in an enclosed space such as the chamber of a firearm.

In effect, ignition occurs when the powder granules are heated above their ignition temperature. This can occur by exposing powder to:

1. A flame such as a match or primer flash.
2. An electrical spark or the sparks from welding, grinding, etc..
3. Heat from an electric hot plate or a fire directed or near a closed container even if the powder itself is not exposed to the flame.

When smokeless powder burns, a great deal of gas at high temperature is formed. If the powder is confined, this gas will create pressure in the surrounding structure. The rate of gas generation is such, however, that the pressure can be kept at a low level if sufficient space is available or if the gas can escape.

In this respect smokeless powder differs from blasting agents or high explosives such as dynamite or blasting gelatin,

although smokeless powder may contain chemical ingredients common to some of these products.

High explosives such as dynamite are made to detonate, that is, to change from solid state to gaseous state with evolution of intense heat at such a rapid rate that shock waves are propagated through any medium in contact with them. Such shock waves exert pressure on anything they contact, and, as a matter of practical consideration, it is almost impossible to satisfactorily vent away the effects of a detonation involving any appreciable quantity of dynamite.

Smokeless powder differs considerably in its burning characteristics from common "black powder".

Black powder burns essentially at the same rate out in the open (unconfined) as when in a gun.

When ignited in an unconfined state, smokeless powder burns inefficiently with an orange-colored flame. It produces a considerable amount of light brown noxious smelling smoke. It leaves a residue of ash and partially burned powder. The flame is hot enough to cause severe burns.

The opposite is true when it burns under pressure as in a cartridge fired in a gun. Then it produces very little smoke, a small glow, and leaves very little or no residue. The burning rate of smokeless powder increases with increased pressure.

If burning smokeless powder is confined, gas pressure will rise and eventually can cause the container to burst. Under such circumstances, the bursting of a strong container creates effects similar to an explosion.

For this reason, the Department of Transportation (formerly Interstate Commerce Commission) sets specifications for shipping containers for propellants and requires tests for loaded containers - under actual fire conditions - before approving them for use.

When smokeless powder in D.O.T. approved containers is ignited during such tests, container seams split open or lids pop off - to release gases and powder from confinement at low pressure.

Properties and Storage of Smokeless Powder

How to Check Smokeless Powder for Deterioration

Although modern smokeless powders are basically free from deterioration under proper storage conditions, safe practices require a recognition of the signs of deterioration and its possible effects.

Powder deterioration can be checked by opening the cap on the container and smelling the contents.

Powder undergoing deterioration has an irritating acidic odor. (Don't confuse this with common solvent odors such as alcohol, ether and acetone).

Check to make certain that powder is not exposed to extreme heat as this may cause deterioration. Such exposure produces an acidity which accelerates further reaction and has been known, because of the heat generated by the reaction, to cause spontaneous combustion.

Never salvage powder from old cartridges and do not attempt to blend salvaged powder with new powder. Don't accumulate old powder stocks. The best way to dispose of deteriorated smokeless powder is to burn it out in the open at an isolated location in small shallow piles (not over 1" deep). The quantity burned in any one pile should never exceed one pound. Use an ignition train of slow burning combustible material so that the person may retreat to a safe distance before powder is ignited.

Considerations for Storage of Smokeless Powder

Smokeless powder is intended to function by burning, so it must be protected against accidental exposure to flame, sparks or high temperatures.

For these reasons, it is desirable that storage enclosures be made of insulating materials to protect the powder from external heat sources.

Once smokeless powder begins to burn, it will normally continue to burn (and generate gas pressure) until it is consumed.

D.O.T. approved containers are constructed to open up at low internal pressures to avoid the effects normally produced by the rupture or bursting of a strong container.

Storage enclosures for smokeless powder should be constructed in a similar manner:

1. Of fire-resistant and heat-insulating materials to protect contents from external heat.
2. Sufficiently large to satisfactorily vent the gaseous products of combustion which would result if the quantity of smokeless powder within the enclosure accidentally ignited.

If a small, tightly enclosed storage enclosure is loaded to capacity with containers of smokeless powder, the walls of the enclosure will expand or move outwards to release the gas pressure - if the powder in storage is accidentally ignited.

Under such conditions, the effects of the release of gas pressure are similar or identical to the effects produced by an explosion.

Hence only the smallest practical quantities of smokeless powder should be kept in storage, and then in strict compliance with all applicable regulations and recommendations of the National Fire Protection Association.

Properties and Storage of Smokeless Powder

Recommendations for Storage of Smokeless Powder

DO NOT SMOKE IN AREAS WHERE POWDER IS STORED OR USED. Place appropriate "NO SMOKING" signs in these areas. THE STORAGE CABINETS SHOULD BE CONSTRUCTED OF INSULATING MATERIALS AND WITH A WEAK WALL, SEAMS OR JOINTS TO PROVIDE AN EASY MEANS OF SELFVENTING.

DO NOT KEEP OLD OR SALVAGED POWDERS. Check old powders for deterioration regularly. Destroy deteriorated powders immediately.

OBEY ALL REGULATIONS REGARDING QUANTITY AND METHODS OF STORING. Do not store all your powders in one place. If you can, maintain separate storage locations. Many small containers are safer than one or more large containers.

KEEP YOUR STORAGE AND USE AREA CLEAN. Clean up spilled powder promptly. Make sure the surrounding area is free of trash or other readily combustible materials.

The above information has been provided with permission from SAAMI: SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE, INC. P.O. Box 838, Branford, CT 06405.

Reloading Safety

Reloading is an enjoyable and rewarding hobby that is easily conducted with safety. But like many other human endeavours, carelessness or negligence can make reloading hazardous. The essence of reloading safety is proper handling and storage of primers and powder. As important is strict following of the instructions given by the manufacturers of the reloading equipment as well as the reloading components.

Before you get started, read the safety rules below and keep them in mind whenever reloading. Attention paid to detail and patience ensures safety and quality!

■ Reload only when you can give it your undivided attention. **Do not reload**, when fatigued or ill. Develop your own reloading routine to avoid mistakes. Avoid haste, load at a leisurely place and keep in mind that **absolutely no reloading under the influence of alcohol or drugs!**

■ Always wear proper eye protection. It is an unnecessary risk to reload without safety glasses.

■ Store powder and primers out of reach of children and away from heat and open fire. **Follow the manufacturer's instructions on your powder canister. Never smoke during a reloading session!**

■ Keep no more powder than needed available. Immediately return the unused powder to its original factory container to preserve its identity and usable life time.

■ Do not use any powder unless its identity is positively known. Scrap all unidentified powders according to the manufacturer's instructions on your powder canister. **Keep in mind that the trial-and-error method may lead to serious injury!**

■ **Do not store primers in bulk! Doing so will create a bomb!** Bulk primers will very likely mass detonate. The blast of a few hundred primers corresponds to a hand grenade in a room! Do not force primers in any circumstances. Take special care when filling and handling auto primer feed tubes. Keep primers in their original factory packing until used. Return unused primers to their original packing.

■ Do not use primers if their identity is lost. Discard them according to the manufacturer's instructions.

■ Start loading with the starting load according to the loading data. If there is no indication of the starting load, use 15 % lower charge than the listed maximum load. Increase the charge using small steps watching for overpressure signs from the primer and the case head at each step. **If you detect overpressures immediately stop shooting and reduce the charge.** Immediately disassemble the defective cartridges. **NEVER EXCEED THE MAXIMUM LOADS!**

■ Check visually the powder level in the cases so you are absolutely sure that you have no double powder charge. When a double powder charge is fired it may result in a gun damage, personal injury, even death.

■ If you change the lot of any component or if you change any of the components of your reload, you must develop your load from the starting load again. A different component as well as a component from a different manufacturing lot may cause changes in cartridge pressure.

■ You must absolutely follow the given cartridge overall lengths (C.O.L.) according to the reloading tables. The change in the bullet seating depth has a significant influence on the cartridge pressure.

■ Never reduce loads under the listed starting load.

■ Keep your reloading bench in good order. Clean up spilled powder and primers promptly and completely. Remember that the reloading bench is not a temporary store for other tools, used car spare parts etc.

■ Use your reloading equipment according to the manufacturer's recommendations. Study the instructions carefully and don't hesitate to ask, if you don't understand everything.

■ Be safe, be conscientious!

Reloading Safety

■ **WASH YOUR HANDS** thoroughly with warm water and soap after shooting or reloading.

■ **DO NOT EAT OR DRINK** during a reloading session. When handling fired cartridge cases the residual containing lead most likely gets to your hands. Therefore eating something requiring a straight hand contact during a reloading session hazards the reloader to lead exposure. Keep your hands away from your nose or your mouth during a reloading session.

■ **KEEP GOOD HOUSEHOLD AT YOUR RELOADING SITE.** Regular cleaning prevents the accumulation of residuals. Use a damp cloth or mop to clean up the reloading bench as well as the floor underneath. **DO NOT USE A VACUUM CLEANER!** The use of it poses a potential risk of exposure due to the spilled powder it collects up. Furthermore, an ordinary vacuum cleaner more spreads than collects the dust containing residuals.. Do not use any carpet at your reloading site. Carpet is hard to keep dust-free and it can create static electricity that can accidentally fire a primer.

■ **PROTECT YOUR BREATHING AGAINST THE DUST IN THE RELOADING AREA.** When using a dry tumbling media in cleaning the cartridge cases, keep in mind that the lead residue from the fired cases moves to the tumbling media, where it accumulates by use. Wear always a dust mask when pouring the dry cleaning media out of the tumbler and be careful not to spill the media on your reloading bench.

Rifle Reloading Data

Disclaimer

All of this reloading information has been provided by Nammo Lapua Oy. The data given here were obtained in laboratory conditions following strictly the CIP (Commission International Permanente) June 13, 1990 and November 9, 1993 rules. The listed maximum loads have been determined according to the respective CIP/SAAMI maximum pressure specification, whichever is lower.

These test methods have been deemed to be safe throughout the world. Pressure is measured at the case mouth or from inside the case according to the CIP.

DO NOT ATTEMPT ANY EXTRAPOLATIONS. PLEASE FOLLOW THE DATA AS WRITTEN.

IT IS A MUST FOR EVERY RELOADER TO READ THE RELOADING SAFETY RULES ON THE PAGES 16 AND 17 OF THIS GUIDE.

.204 Ruger

Test barrel: 630 mm (24¾"), 1 in 12" twist

Primers: Small Rifle

Cases: Hornady, trim-to length 46,80 mm (1.843")

Bullet			Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Weight [g]	Velocity [m/s]	
[grs]			[in.]		[grs]	[fps]	[grs]	[fps]	
2,1	32	Blitz King	Sierra	N130	1,48	22.8	1106	3629	1,62
				N135	1,59	24.5	1112	3648	1,75
				N530	1,56	24.1	1070	3510	1,75
2,6	40	V-Max	Hornady	N133	1,50	23.1	1011	3317	1,64
				N530	1,50	23.1	1013	3323	1,67
				N140	1,70	26.2	1027	3369	1,82
3,2	50	HPBT	Berger	N133	1,40	21.6	857	2812	1,54
				N530	1,43	22.1	866	2841	1,56
				N140	1,57	24.2	884	2900	1,76

.22 Hornet

Test barrel: 600 mm (23½"), 1 in 16" twist

Primers: Small Rifle

Cases: Sako, trim-to length 35,40 mm (1.394")

Bullet			Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Weight [g]	Velocity [m/s]	
[grs]			[in.]		[grs]	[fps]	[grs]	[fps]	
2,6	40	Spire Point	Speer	N110	0,52	8.0	713	2338	0,65
				N110	0,48	7.3	654	2144	0,60
				N120	0,47	7.3	609	1997	0,56
2,9	45	Spitzer	Speer	N110	0,62	9.5	612	2008	0,74
				N120	0,62	9.5	612	2008	0,74
				N120	0,58	9.0	574	1884	0,69
3,2	50	Spitzer	Speer	N110	0,41	6.4	561	1841	0,53F
				N120	0,41	6.4	561	1841	0,53F
				N120	0,58	9.0	574	1884	0,69
3,6	55	Spitzer	Speer	N110	0,41	6.4	561	1841	0,53F
				N120	0,41	6.4	561	1841	0,53F
				N120	0,58	9.0	574	1884	0,69

F = Case full

.221 Remington Fireball

Test barrel: 356 mm (14"), 1 in 12" twist

Primers: Small Rifle

Cases: Lapua, trim-to length 35,40 mm (1.394")

Bullet			Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Weight [g]	Velocity [m/s]	
[grs]			[in.]		[grs]	[fps]	[grs]	[fps]	
2,6	40	Blitz King	Sierra	N120	1,06	16.4	876	2874	1,12
				N130	1,18	18.2	879	2884	1,25F
				N130	1,09	15.4	713	2339	1,05
3,4	52	Match King	Sierra	N120	0,96	14.8	775	2543	1,12
				N130	1,00	15.4	713	2339	1,12
				N133	1,20	18.5	793	2602	1,25F

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.221 Remington Fireball

cont.

Bullet	Powder			Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Weight [g]	Velocity [m/s]	
[grs]			[in.]		[grs]	[fps]	[grs]	[fps]	
3,6	55	FMJ	Lapua	46,5	1,831	N120	0,92	14,2	732
				N130	1,00	15,4	748	2454	1,07
				N133	1,18	18,2	774	2539	1,22F
3,6	55	Soft Point	Lapua	46,5	1,831	N120	0,86	13,3	718
				N130	1,06	16,4	752	2467	1,13
				N133	1,18	18,2	764	2507	1,25F

F = Case full

.222 Remington

Test barrel: 580 mm (23"), 1 in 14" twist

Primers: Small Rifle

Cases: Lapua, trim-to length 43,00 mm (1.693")

Bullet	Powder			Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Weight [g]	Velocity [m/s]	
[grs]			[in.]		[grs]	[fps]	[grs]	[fps]	
2,3	35	V-Max	Hornady	52,0	2,047	N110	0,93	14,4	986
				N120	1,31	20,2	1036	3399	1,41
				N130	1,44	22,2	1053	3455	1,55
2,6	40	Blitz King	Sierra	54,0	2,126	N110	0,92	14,2	942
				N120	1,32	20,4	922	3025	1,43
				N130	1,38	21,3	997	3271	1,45
2,9	45	Soft Point	Sierra	54,0	2,126	N120	1,22	18,8	926
				N130	1,34	20,7	951	3120	1,46
				N133	1,43	22,1	944	3097	1,56F
3,2	50	SPSX	Hornady	53,0	2,087	N120	1,20	18,5	896
				N130	1,30	20,1	912	2992	1,39
				N133	1,38	21,3	908	2979	1,49
3,3	51	HPCE	Lapua	54,0	2,126	N120	1,18	18,2	891

.223 Remington				cont.				Powder		Starting load				Maximum load			
Bullet		Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]			
3,2	50	TNT-HP	Speer	57,0	2.244	N120	1,25	19.3	911	2989	1,47	22.7	1036	3399			
						N130	1,43	22.1	947	3107	1,59	24.5	1046	3432			
						N133	1,56	24.1	990	3248	1,68F	25.9F	1077	3533			
						N135	1,65	25.5	999	3278	1,68F	25.9F	1018	3340			
						N120	1,23	19.0	909	2982	1,37	21.1	991	3251			
3,3	51	HPCE	Lapua	57,0	2.244	N130	1,35	20.8	930	3051	1,51	23.3	1018	3340			
						N530	1,53	23.6	963	3159	1,66	25.6	1052	3451			
						N133	1,45	22.4	943	3094	1,61A	24.8A	1033	3389			
						N135	1,54	23.8	957	3140	1,68F	25.9	1034	3392			
						N130	1,37	21.1	936	3071	1,54	23.8	1028	3373			
3,4	52	HPBT	Sierra	57,0	2.244	N133	1,46	22.5	948	3110	1,62	25.0	1033	3389			
						N135	1,54	23.8	808	2651	1,66F	25.6F	1039	3409			
						N120	1,09	16.8	820	2690	1,31	20.2	939	3081			
						N130	1,21	18.7	857	2812	1,42	21.9	959	3146			
						N133	1,36	21.0	876	2874	1,56	24.1	980	3215			
3,6	55	Soft Point	Lapua	56,5	2.224	N530	1,44	22.2	891	2923	1,61	24.8	995	3264			
						N135	1,43	22.1	899	2949	1,64F	25.3F	1004	3294			
						N140	1,57	24.2	915	3002	1,74F	26.9F	1014	3327			
						N120	1,21	18.7	889	2917	1,34	20.7	960	3150			
						N130	1,41	21.8	956	3136	1,52	23.5	1013	3323			
3,6	55	FMJBT	Hornady	57,0	2.244	N530	1,50	23.1	941	3087	1,62	25.0	1022	3353			
						N133	1,43	22.1	928	3045	1,59	24.5	1006	3301			
						N135	1,51	23.3	938	3077	1,66	25.6	1017	3337			
						N140	1,60	24.7	930	3051	1,74	26.8	1019	3343			
						N140	1,61	24.8	917	3009	1,77F	27.3F	1004	3294			
3,9	60	HP	Hornady	57,0	2.244	N130	1,33	20.5	874	2867	1,50	23.1	967	3173			
						N133	1,43	22.1	888	2913	1,60	24.7	978	3209			
						N135	1,50	23.1	893	2930	1,67	25.8	976	3202			
						N140	1,62	25.0	895	2936	1,74F	26.8F	965	3166			
						N530	1,43	22.1	861	2825	1,56	24.1	953	3127			
4,0	62	FMJBT	Speer	57,4	2.260	N135	1,43	22.1	852	2795	1,60	24.7	942	3091			
						N140	1,62	25.0	901	2956	1,70F	26.2F	943	3094			
						N133	1,34	20.7	792	2598	1,48	22.8	867	2844			
						N135	1,40	21.6	804	2638	1,54	23.8	875	2871			
						N140	1,53	23.6	820	2690	1,68	25.9	897	2943			
4,5	69	Scenar ¹⁾	Lapua	57,4	2.260	N540	1,56	24.1	824	2703	1,71	26.4	910	2986			
						N530	1,37	21.1	809	2654	1,47	22.7	869	2851			
						N133	1,31	20.2	789	2589	1,42	21.9	849	2785			
						N135	1,37	21.1	796	2612	1,49	23.0	862	2828			
						N140	1,48	22.8	823	2700	1,60	24.7	879	2884			
4,9	75	BTHP ²⁾	Hornady	57,4	2.260	N540	1,50	23.1	807	2648	1,65	25.5	895	2936			
						N135	1,34	20.7	752	2467	1,51	23.3	830	2723			
						N140	1,43	22.1	754	2474	1,62	25.0	843	2766			
						N530	1,50	23.1	773	2536	1,67	25.8	863	2831			
						N140	1,48	22.8	823	2700	1,60	24.7	879	2884			
5,0	77	Scenar	Lapua	57,4	2.260	N530	1,25	19.3	712	2336	1,44	22.2	812	2664			
						N135	1,22	18.8	701	2300	1,39	21.5	803	2635			
						N140	1,35	20.8	704	2310	1,57	24.2	801	2628			
						N540	1,41	21.8	720	2362	1,59	24.5	814	2671			
						N135	1,28	19.8	712	2336	1,43	22.1	795	2608			
5,0	77	HPBT ²⁾	Sierra	57,4	2.260	N135	1,27	19.6	706	2316	1,46	22.5	791	2595			
						N140	1,36	21.0	712	2336	1,60	24.7	810	2657			
						N540	1,47	22.7	740	2428	1,64	25.3	828	2717			
						N530	1,30	20.0	713	2339	1,50	23.1	801	2630			
						N135	1,22	18.8	711	2333	1,40	21.6	788	2587			
5,2	80	HPBT ³⁾	Sierra	64,8	2.551	N140	1,34	20.7	730	2395	1,49	23.0	807	2646			
						N540	1,39	21.4	730	2395	1,53	23.7	808	2652			

.223 Remington

cont

23 Remington

com

12.30 Remington					cont.		Powder		Starting load				Maximum load			
Bullet		Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g] [grs]		Velocity [m/s] [fps]		Weight [g] [grs]		Velocity [m/s] [fps]			
5,8	90	HPBT	Sierra	59,8	2.354	N140	1,25	19.3	640	2100	1,44	22.2	742	2434		
						N150	1,24	19.1	648	2126	1,48	22.8	748	2454		
						N540	1,34	20.7	678	2224	1,52	23.5	762	2500		
5,8	90	HPBT	Berger	62,4	2.457	N140	1,25	19.3	646	2119	1,41	21.8	735	2411		
						N150	1,26	19.4	651	2136	1,46	22.5	741	2431		
						N540	1,34	20.7	682	2238	1,49	23.0	759	2490		

A = Accuracy load F = Case full

1) 1 in 10" twist 2) 1 in 7" twist 3) Test barrel with a long throat to accept the C.O.L. of 65 mm (2,559")

.223 WSSM

Test barrel: 640 mm (25"), 1 in 8" twist

Primers: Large Rifle

Cases: Winchester, trim-to length 42,20 mm (1.661")

Bullet					Powder	Starting load				Maximum load				
Weight [g]		Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]		Velocity [m/s]		Weight [g]		Velocity [m/s]	
							[grs]	[grs]	[fps]	[grs]	[fps]			
3,3	51	HPCE	Lapua	54,6	2.150	N135	2,10	32.4	1011	3317	2,61	40.3	1180	3871
						N530	2,22	34.3	1055	3461	2,59	40.0	1205	3953
						N140	2,49	38.4	1074	3524	2,83	43.7	1183	3881
3,6	55	Soft Point	Lapua	54,5	2.146	N135	2,09	32.3	1001	3284	2,49	38.4	1119	3671
						N530	2,14	33.0	1009	3310	2,48	38.3	1147	3763
						N140	2,24	34.6	996	3268	2,68	41.4	1140	3740
4,5	69	Scenar	Lapua	56,7	2.232	N140	2,29	35.3	933	3061	2,61	40.3	1030	3379
						N540	2,35	36.3	960	3150	2,68	41.4	1077	3533
						N150	2,33	36.0	947	3107	2,61	40.3	1048	3438
						N550	2,48	38.3	972	3189	2,84	43.8	1078	3537

.22 PPC-USA

Test barrel: 610 mm (24"), 1 in 14" twist

Primers: Small P

Cases: Winchester, trim-to length 42,20 mm (1.661")

Bullet					Powder	Starting load				Maximum load			
Weight [g]		Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]		Velocity [m/s]		Weight [g]		Velocity [m/s]	
[grs]				[in.]		[grs]	[grs]	[fps]	[fps]	[grs]	[grs]	[fps]	[fps]
3,4	52	HPBT	Sierra	51,4	2.024	N120	1,33	20,5	919	3016	1,56	24,1	1039
						N130	1,43	22,1	934	3063	1,66	25,6	1069
						N133	1,51	23,3	947	3107	1,77	27,3	1087
						N135	1,65	25,5	971	3185	1,90	29,2	1099
3,6	55	Spitzer	Speer	51,8	2.039	N130	1,41	21,8	898	2946	1,69	26,1	1026
						N133	1,45	22,4	901	2956	1,78	27,4	1039
						N135	1,68	25,9	961	3151	1,93	29,7	1103

.22-250 Remington

Test barrel: 580 mm (22") 1 in 14" twist

Primers: Large P

Cases: Lapua 22-250 Remington trim-to length 48.30mm (1.902")

Bullet						Powder	Starting load				Maximum load			
Weight [g]		Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]		Velocity [m/s]		Weight [g]		Velocity [m/s]	
[grs]							[grs]	[grs]	[fps]	[grs]	[grs]	[fps]	[fps]	
2,6	40	Blitz King	Sierra	56,9	2.240	N130	1,79	27,6	1097	3599	1,98	30,6	1194	3917
						N133	1,97	30,4	1099	3606	2,15	33,2	1205	3953
						N135	2,03	31,3	1097	3599	2,18	33,6	1207	3960
						N140	2,19	33,8	1111	3645	2,39	36,9	1211	3973
2,9	45	SP	Sierra	58,9	2.319	N130	1,66	25,6	1023	3356	1,99	30,7	1145	3757
						N133	1,87	28,9	1033	3389	2,10	32,4	1126	3694
						N135	1,87	28,9	1023	3356	2,18	33,6	1154	3786
						N150	2,06	31,8	1033	3389	2,32	35,8	1137	3730
3,3	51	HPCE	Lapua	59,6	2.346	N133	1,75	27,0	969	3179	1,99	30,7	1064	3491
						N135	1,72	26,5	959	3146	1,96	30,2	1055	3461
						N140	1,99	30,7	988	3241	2,19	33,8	1087	3566
						N540	2,08	32,1	1001	3284	2,32	35,8	1105	3625

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.22-250 Remington

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
3,6	55	FMJ	Lapua	59,6	2.346	N135	1,75	27,0	936	3071	1,98	30,6	1040	3412
						N140	1,94	29,9	959	3146	2,17	33,5	1050	3445
						N540	2,03	31,3	972	3189	2,29	35,3	1085	3560
						N150	1,98	30,6	968	3176	2,25	34,7	1057	3468
3,6	55	Soft Point	Lapua	59,5	2.343	N135	1,62	25,0	902	2959	1,82	28,1	990	3248
						N140	1,81	27,9	932	3058	2,04	31,5	1017	3337
						N540	2,09	32,3	981	3219	2,29	35,3	1075	3527
						N150	1,83	28,2	903	2963	2,08	32,1	1019	3343
3,9	60	HP	Hornady	59,6	2.346	N135	1,62	25,0	845	2772	1,86	28,7	955	3133
						N140	1,81	27,9	887	2910	2,10	32,4	989	3245
						N540	2,06	31,8	938	3077	2,27	35,0	1043	3422
						N150	1,91	29,5	907	2976	2,16	33,3	1012	3320
4,0	62	TSX	Barnes	59,7	2.350	N140	1,67	25,8	831	2726	1,90	29,3	930	3051
						N540	1,82	28,1	865	2838	2,09	32,3	974	3196
						N150	1,72	26,5	843	2766	1,98	30,6	943	3094
4,5	69	HPBT ¹⁾	Lapua	59,6	2.346	N140	1,71	26,4	820	2690	1,98	30,6	914	2999
						N540	1,85	28,5	843	2766	2,10	32,4	939	3081
						N150	1,77	27,3	836	2743	2,05	31,6	921	3022
						N550	1,98	30,6	854	2802	2,24	34,6	953	3127

¹⁾ 1 in 10" twist**6 mm PPC-USA**

Testbarrel: 580 mm (23"), 1 in 14" twist

Primers: Small Rifle

Cases: Sako, trim-to length 38,30 mm (1.508")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
4,4	68	HPFB	Euber	53,6	2.110	N130	1,52	23,4	843	2766	1,68	25,9	928	3045
						N133	1,63	25,2	840	2756	1,83C	28,2C	951	3120
4,5	70	HPBT	Sierra	53,6	2.110	N120	1,39	21,5	809	2654	1,55	23,9	901	2956
						N130	1,47	22,7	820	2690	1,69	26,1	934	3064
						N133	1,59	24,6	826	2710	1,79C	27,6C	935	3068

C = Compressed load

6 mm BR Norma

Testbarrel: 650 mm (25½"), 1 in 8" twist

Primers: Small Rifle

Cases: Lapua, trim-to length 39,40 mm (1.551")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
4,5	70	HPBT	Sierra	57,0	2.244	N133	1,64	25,3	864	2834	1,86	28,7	957	3140
						N135	1,88	29,0	901	2956	2,20	33,9	1009	3310
5,0	77	HP	Lapua	57,0	2.244	N135	1,81	27,9	880	2887	2,01	31,0	957	3140
						N140	1,94	29,9	882	2894	2,15	33,2	965	3166
						N540	2,00	30,9	888	2913	2,18	33,6	980	3215
5,0	77	HP SJ	Lapua	60,0	2.362	N133	1,85	28,5	884	2900	2,01A	31,0A	964	3163
						N140	2,05	31,6	900	2953	2,22	34,3	982	3222
						N540	2,14	33,0	914	2999	2,31	35,6	999	3278
5,5	85	TSX	Barnes	58,5	2.303	N140	1,62	25,0	775	2543	1,88	29,0	877	2877
						N540	1,72	26,5	803	2635	1,97	30,4	908	2979
						N150	1,63	25,2	776	2546	1,90	29,3	874	2867
5,8	90	Naturalis	Lapua	54,7	2.154	N140	1,75	27,0	790	2592	2,03	31,3	879	2884
						N540	1,89	29,2	816	2677	2,11	32,6	915	3002
						N150	1,81	27,9	795	2608	2,10	32,4	887	2910
5,8	90	Scenar	Lapua	60,0	2.362	N140	1,68	26,0	788	2584	1,93	29,8	871	2858
						N540	1,69	26,1	757	2484	2,20	33,9	952	3123
5,8	90	Scenar SJ	Lapua	60,0	2.362	N135	1,85	28,5	830	2723	2,04A	31,5A	906	2972
						N140	1,96	30,2	847	2779	2,12	32,7	922	3025
						N540	2,02	31,2	854	2802	2,19	33,8	936	3071

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6 mm BR Norma

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	Mega	Lapua	55,3	2.177	N140	1,66	25,6	737	2419	1,88	29,0	825	2707
						N540	1,81	27,9	772	2533	2,01	31,0	857	2812
6,8	105	Scenar	Lapua	60,0	2.362	N140	1,67	25,8	746	2447	1,87	28,9	821	2694
						N540	1,75	27,0	756	2480	1,97	30,4	846	2776
6,8	105	Scenar SJ	Lapua	60,0	2.362	N140	1,83	28,2	763	2503	2,02	31,2	843	2766
						N150	1,85	28,5	769	2523	2,05	31,6	841	2759
						N540	1,88	29,0	777	2549	2,08	32,1	861	2825

A = Accuracy load

.243 WSSM

Test barrel: 690 mm (27"), 1 in 10" twist

Primers: Small Rifle

Cases: Winchester, trim-to length 42,20 mm (1.660")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]
<th

.243 Winchester

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
5,8	90	Scenar	Lapua	68,3	2.689	N540	2,27	35.0	860	2822	2,54	39.2	962	3156
						N150	2,08	32.1	817	2680	2,44	37.7	914	2999
						N550	2,46	38.0	865	2838	2,68	41.4	967	3173
						N160	2,52	38.9	847	2779	2,83	43.7	952	3123
6,2	96	TOG	Brenneke	67,0	2.638	N540	2,15	33.2	820	2690	2,50	38.6	928	3045
						N550	2,46	38.0	843	2766	2,68	41.4	939	3081
						N160	2,60	40.1	824	2703	2,93	45.2	929	3048
						N540	1,97	30.4	770	2526	2,33	36.0	878	2881
6,5	100	Grand Slam	Speer	68,3	2.689	N150	1,86	28.7	722	2369	2,23	34.4	839	2753
						N550	2,21	34.1	787	2582	2,48	38.3	885	2904
						N160	2,23	34.4	769	2523	2,58	39.8	873	2864
						N540	1,95	30.1	729	2392	2,27	35.0	821	2694
6,8	105	Scenar ¹⁾	Lapua	68,3	2.689	N150	2,34	36.1	782	2566	2,59	40.0	890	2920
						N550	2,43	37.5	766	2513	2,70	41.7	869	2851
						N160	2,62	40.4	783	2569	3,00	46.3	894	2933

¹⁾ The test barrel rifle twist 1 in 8"**6 XC**

Test barrel: 620 mm (24"), 1 in 8" twist

Primers: Large Rifle

Cases: Norma, trim-to length 48,20 mm (1.898")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
3,4	52	V-Max	Hornady	62,0	2.441	N135	2,26	34.9	1045	3428	2,55	39.4	1162	3812
						N140	2,48	38.3	1056	3465	2,77	42.7	1175	3855
						N550	2,54	39.2	1079	3540	2,82	43.5	1214	3983
						N540	2,21	34.1	939	3081	2,62	40.4	1066	3497
4,5	70	Match King	Sierra	63,0	2.480	N150	2,21	34.1	939	3081	2,62	40.4	1066	3497
						N540	2,41	37.2	998	3274	2,66	41.1	1110	3642
						N550	2,05	31.6	768	2520	2,82	43.5	1109	3638
						N540	2,29	35.3	927	3041	2,58	39.8	1063	3488
5,0	77	HP	Lapua	64,0	2.520	N150	2,26	34.9	911	2989	2,59	40.0	1028	3373
						N540	2,29	35.3	927	3041	2,58	39.8	1063	3488
						N550	2,45	37.8	940	3084	2,74	42.3	1069	3507
						N540	2,01	31.0	812	2664	2,38	36.7	921	3022
5,8	90	Naturalis	Lapua	63,8	2.512	N150	2,08	32.1	846	2776	2,47	38.1	969	3179
						N550	2,24	34.6	851	2792	2,61	40.3	972	3189
						N540	2,09	32.3	859	2818	2,43	37.5	988	3241
						N150	1,94	29.9	817	2680	2,35	36.3	942	3091
6,8	105	Scenar	Lapua	69,0	2.717	N540	2,23	34.4	867	2844	2,60	40.1	993	3258
						N550	2,07	31.9	796	2612	2,37	36.6	895	2936
						N160	2,05	31.6	767	2516	2,43	37.5	875	2871

6 mm Remington

Testbarrel: 660 mm (26"), 1 in 10" twist

Primers: Large Rifle

Cases: Remington, trim-to length 56,60 mm (2.228")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
3,8	58	V-Max	Hornady	70,4	2.772	N140	2,47	38.1	1053	3455	2,80	43.2	1173	3848
						N540	2,68	41.4	1084	3556	3,01	46.5	1207	3960
						N150	2,50	38.6	1055	3461	2,91	44.9	1176	3858
						N540	1,97	30.4	858	2815	2,49	38.4	983	3225
5,5	85	Partition	Nosler	70,4	2.772	N140	2,11	32.6	868	2848	2,47	38.1	973	3192
						N540	2,25	34.7	899	2949	2,65	40.9	1012	3320
						N550	2,41	37.2	903	2963	2,85	44.0	1022	3353
						N540	2,38	36.7	933	3061	2,71	41.8	1046	3432
5,0	77	HP	Lapua	70,4	2.772	N140	2,55	39.4	971	3186	2,84	43.8	1073	3520
						N150	2,50	38.6	950	3117	2,80	43.2	1051	3448
						N550	2,73	42.1	972	3189	3,01	46.5	1093	3586

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6 mm Remington

cont.

Bullet	Powder	Starting load			Maximum load					
Weight [g]	[grs]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]

<tbl_r cells="4" ix="1" maxcspan="3" max

6,5 mm Grendel

Test barrel: 610 mm (24"), 1 in 10" twist
 Primers: Small Rifle
 Cases: Lapua, trim-to length 38,50 mm (1.516")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	FMJ	Lapua	53,0	2.087	N130	1,32	20.4	705	2313	1,54	23.8	784	2572
				N133		1,51	23.3	728	2388	1,72	26.5	811	2661	
				N530		1,56	24.1	729	2392	1,79	27.6	829	2720	
6,5	100	Scenar	Lapua	57,1	2.248	N130	1,40	21.6	674	2211	1,76	27.2	840	2756
				N530		1,60	24.7	729	2392	1,90	29.3	858	2815	
				N133		1,57	24.2	728	2388	1,90	29.3	854	2802	
7,0	108	Scenar	Lapua	57,1	2.248	N130	1,40	21.6	671	2201	1,69	26.1	791	2595
				N530		1,44	22.2	690	2264	1,73	26.7	821	2694	
				N133		1,51	23.3	689	2260	1,80	27.8	804	2638	
7,8	120	TSX	Barnes	53,0	2.087	N530	1,34	20.7	592	1942	1,62	25.0	707	2320
				N133		1,17	18.1	578	1896	1,58	24.4	678	2224	
				N540		1,58	24.4	631	2070	1,88	29.0	751	2464	
8,0	123	Scenar	Lapua	57,1	2.248	N530	1,47	22.7	635	2083	1,73	26.7	763	2503
				N133		1,36	21.0	609	1998	1,73	26.7	745	2444	
				N135		1,29	19.9	593	1946	1,75	27.0	741	2431	
8,8	136	Scenar-L	Lapua	57,1	2.248	N530	1,47	22.7	644	2113	1,65	25.5	725	2379
				N135		1,33	20.5	597	1959	1,65	25.5	701	2300	
				N140		1,59	24.5	655	2149	1,83	28.2	731	2398	
				N540		1,67	25.8	661	2169	1,83	28.2	741	2431	
9,0	139	Scenar	Lapua	57,1	2.248	N530	1,40	21.6	606	1988	1,60	24.7	694	2277
				N135		1,23	19.0	547	1795	1,55	23.9	664	2178	
				N140		1,57	24.2	620	2034	1,78	27.5	706	2316	
				N540		1,64	25.3	642	2106	1,82	28.1	725	2379	
9,1	140	Naturalis	Lapua	57,5	2.264	N530	1,41	21.8	595	1952	1,65	25.5	694	2277
				N140		1,42	21.9	579	1900	1,74	26.9	680	2231	
				N540		1,59	24.5	616	2021	1,86	28.7	714	2343	
9,3	144	FMJBT	Lapua	57,1	2.248	N530	1,40	21.6	610	2001	1,57	24.2	679	2228
				N135		1,19	18.4	553	1814	1,37	21.1	621	2037	
				N140		1,49	23.0	640	2100	1,77	27.3	704	2310	
				N540		1,60	24.7	638	2093	1,80	27.8	718	2356	
10,1	156	Mega	Lapua	57,4	2.260	N530	1,28	19.8	539	1768	1,50	23.1	615	2018
				N140		1,31	20.2	513	1683	1,62	25.0	627	2057	
				N540		1,38	21.3	537	1762	1,67	25.8	647	2123	
				N150		1,30	20.1	511	1677	1,62	25.0	615	2018	

6,5 x 47 Lapua

Test barrel: 700 mm (27 1/2"), 1 in 8 1/2" twist
 Primers: Small Rifle
 Cases: Lapua, trim-to length 46,80 mm (1.843")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	FMJ	Lapua	62,5	2.461	N133	1,91	29.5	778	2552	2,20	34.0	886	2907
				N135		1,91	29.5	765	2510	2,20	34.0	875	2871	
				N140		2,15	33.2	801	2628	2,48	38.3	908	2979	
6,5	100	Scenar	Lapua	69,5	2.736	N133	2,10	32.4	870	2854	2,26	34.9	925	3035
				N135		2,20	34.0	890	2920	2,31	35.6	930	3051	
				N140		2,40	37.0	900	2953	2,56	39.5	950	3117	
				N540		2,32	35.8	874	2867	2,64	40.7	992	3255	
				N150		2,17	33.5	831	2726	2,53	39.0	954	3130	
7,0	108	Scenar	Lapua	69,5	2.736	N133	1,96	30.2	807	2648	2,20	33.9	882	2894
				N135		2,04	31.5	814	2671	2,23	34.4	885	2904	
				N140		2,23	34.4	828	2717	2,51	38.7	910	2986	
				N540		2,27	35.0	839	2753	2,55	39.4	943	3094	
				N150		2,35	36.3	849	2785	2,63	40.6	930	3051	
				N550		2,39	36.9	836	2743	2,68	41.4	948	3110	

6,5 x 47 Lapua

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
7,8	120	Scenar-L	Lapua	69,5	2.736	N140	1,80	27.8	731	2398	2,35	36.3	853	2799
				N540		2,14	33.0	772	2533	2,45	37.8	889	2917	
				N150		2,06	31.8	744	2441	2,43	37.5	859	2818	
				N550		2,31	35.6	776	2546	2,62	40.4	895	2936	
7,8	120	TSX	Barnes	64,5	2.539	N150	1,99	30.7	690	2264	2,43	37.5	830	2723
				N540		2,20	34.0	748	2454	2,48	38.3	846	2776	
				N550		2,35	36.3	750	2461	2,70	41.7	872	2861	
8,0	123	Scenar	Lapua	69,5	2.736	N140	2,15	33.2	768	2520	2,36	36.4	840	2756
				N540		2,31	35.7	818	2685	2,57	39.7	907	2976	
				N150		2,23	34.4	788	2585	2,45	37.8	855	2805	
				N550		2,26	34.9	780	2559	2,57	39.7	878	2881	
8,1	125	Partition	Nosler	65,0	2.559	N140	1,95	30.1	715	2346	2,35	36.3	820	2690
				N150		2,01	31.0	727	2385	2,40	37.0	829	2720	
				N540		2,18	33.6	760	2493	2,44	37.7	858	2815	
8,4	130	TSX	Barnes	64,5	2.539	N150	1,81	27.9	597	1959	2,31	35.6	765	2510
				N540		2,08	32.1	691	2267	2,42	37.3	819	2687	

6.5 Creedmoor

cont.

Bullet			Powder			Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
9,0	139	Scenar	Lapua	69,0	2.717	N150	1,90	29.3	690	2264	2,30
						N540	2,00	30.9	713	2339	2,38
						N550	2,20	34.0	735	2411	2,57
						N160	2,14	33.0	700	2297	2,73
9,1	140	Naturalis	Lapua	69,2	2.724	N150	1,67	25.8	605	1985	2,05
						N540	1,88	29.0	671	2201	2,20
						N550	1,98	30.6	678	2224	2,33
						N160	2,08	32.1	697	2287	2,48
9,1	140	AccuBond	Nosler	71,0	2.795	N150	1,87	28.9	664	2178	2,27
						N540	1,96	30.2	685	2247	2,30
						N550	2,08	32.1	697	2287	2,48
						N160	2,03	31.3	695	2280	2,44
9,3	144	FMJBT	Lapua	69,0	2.717	N150	1,79	27.6	662	2172	2,29
						N540	1,85	28.5	674	2211	2,26
						N550	1,93	29.8	625	2051	2,48
						N160	1,93	29.8	625	2051	2,48

.260 Remington

Test barrel: 475 mm (18¾"), 1 in 9" twist *Test barrel 600 mm (23½")
 Primers: Large Rifle
 Cases: Lapua .260 Remington, trim-to length 51,50mm (2.028")

Bullet			Powder			Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
6,5	100	FMJ	Lapua	66,0	2.598	N140	2,08	32.1	765	2510	2,44
						N540	2,32	35.8	797	2615	2,63
						N150	2,12	32.7	769	2523	2,51
						N160	2,30	35.5	825	2708	2,59
6,5	100	HPFB	Sierra	67,5	2.657	N140	2,31	35.7	813	2669	2,61
						N150	2,39	36.9	831	2725	2,67
						N540	2,33	36.0	816	2677	2,62
						N550	2,49	38.4	823	2700	2,78
6,5	100	Scenar	Lapua	69,0	2.717	N140	2,43	37.5	819	2687	2,70
						N150	2,28	35.1	791	2594	2,54
						N540	2,35	36.2	802	2631	2,58
						N160	2,66	41.0	814	2670	2,92
7,0	108	Scenar	Lapua	71,0	2.795	N150	2,28	35.1	791	2594	2,54
						N540	2,35	36.2	802	2631	2,58
						N160	2,66	41.0	814	2670	2,92
						N160	2,71	41.8	771	2530	2,94
7,8*	120	Scenar-L	Lapua	71,0	2.795	N150	2,32	35.8	761	2497	2,55
						N540	2,29	35.3	739	2425	2,58
						N550	2,54	39.2	788	2585	2,73
						N160	2,71	41.8	771	2530	2,94
7,8	120	SP	Speer	71,0	2.795	N540	2,22	34.2	749	2456	2,48
						N550	2,36	36.5	765	2511	2,64
						N160	2,47	38.2	755	2478	2,80
						N160	2,15	33.2	733	2405	2,50
8,0	123	Scenar	Lapua	71,0	2.795	N150	2,43	37.5	697	2287	2,69
						N550	2,67	41.2	767	2516	2,89
						N160	2,47	38.2	755	2478	2,80
						N160	2,17	33.5	720	2362	2,44
8,4*	130	TSX	Barnes	70,8	2.787	N540	2,17	33.5	720	2362	2,44
						N550	2,26	34.9	717	2352	2,59
						N160	2,32	35.8	702	2303	2,75
						N160	2,47	38.1	755	2477	2,70
8,8*	136	Scenar-L	Lapua	71,0	2.795	N550	2,47	38.1	755	2477	2,70
						N160	2,71	41.8	758	2487	2,99
						N560	2,82	43.5	762	2500	3,10
						N160	2,60	40.1	756	2480	2,56
9,0*	139	Scenar	Lapua	71,0	2.795	N550	2,40	37.0	756	2480	2,56
						N160	2,72	42.0	750	2461	2,99
						N560	2,34	36.1	720	2362	2,65
						N160	2,43	37.5	714	2343	2,85C
9,1*	140	Accubond	Nosler	70,0	2.756	N550	2,40	37.0	756	2480	2,56
						N160	2,40	37.0	756	2480	2,56
						N560	2,40	37.0	756	2480	2,56
						N160	2,40	37.0	756	2480	2,56

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
 LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.260 Remington

cont.

Bullet			Powder			Starting load		
--------	--	--	--------	--	--	---------------	--	--

6,5 x 55 Swedish Mauser

cont.

Bullet			Type	Powder		Starting load			Maximum load					
Weight [g]	[grs]	Type/Name		Mfg	C.O.L. [mm]	[in.]	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
7,8	120	Scenar-L	Lapua	77,0	3.031	N135	2,08	32.1	763	2503	2,31	35.6	820	2690
						N140	2,18	33.6	786	2579	2,42	37.3	822	2697
						N150	2,31	35.6	800	2625	2,52	38.9	855	2805
						N160	2,84	43.8	842	2762	2,96	45.7	880	2887
						N560	3,03	46.8	847	2779	3,23	49.8	907	2976
7,8	120	TSX	Barnes	71,2	2.803	N160	2,72	42.0	815	2674	2,99	46.1	886	2907
						N560	3,06	47.2	838	2749	3,25	50.2	902	2959
						N165	3,24	50.0	862	2828	3,40C	52.5C	909	2982
8,0	123	Scenar	Lapua	80,0	3.150	N530	2,17	33.5	792	2598	2,35	36.3	848	2782
						N140	2,20	34.0	745	2444	2,40	37.0	810	2657
						N540	2,44	37.7	749	2456	2,68	41.4	827	2715
						N150	2,24	34.6	740	2428	2,47	38.1	815	2674
						N550	2,67	41.2	837	2746	2,88	44.4	901	2956
						N160	2,69	41.5	807	2648	2,92	45.1	869	2851
						N560	3,03	46.8	841	2759	3,19	49.2	898	2946
8,0	123	Scenar SJ	Lapua	80,0	3.150	N140	2,35	36.3	787	2582	2,56	39.5	842	2762
						N540	2,56	39.5	825	2707	2,74	42.3	883	2897
						N150	2,40	37.0	780	2559	2,62	40.4	834	2738
						N550	2,41	37.2	768	2520	2,73A	42.1A	857	2811
						N160	2,75	42.4	792	2598	2,88	44.5	831	2726
						N560	3,09	47.7	845	2772	3,22	49.7	901	2956
8,4	130	TSX	Barnes	74,5	2.930	N160	2,29	35.3	726	2382	2,72	42.0	814	2671
						N560	2,92	45.1	796	2612	3,14	48.5	860	2822
						N165	3,08	47.5	808	2651	3,32	51.2	870	2854
8,4	130	HPBT	Norma	80,0	3.150	N140	2,29	35.3	730	2395	2,64	40.7	812	2663
						N540	2,32	35.8	749	2457	2,57	39.6	820	2690
						N150	2,32	35.8	710	2329	2,60	40.1	808	2651
						N550	2,54	39.2	768	2520	2,84	43.8	852	2795
						N160	2,79	43.0	764	2507	3,06	47.3	840	2757
						N560	3,01	46.4	803	2635	3,25	50.2	878	2882
8,8	136	Scenar-L	Lapua	80,0	3.150	N540	2,39	36.9	785	2575	2,59	40.0	836	2743
						N150	2,29	35.3	753	2470	2,46	38.0	803	2635
						N550	2,57	39.7	800	2625	2,73	42.1	841	2759
						N160	2,73	42.1	778	2552	2,93	45.2	840	2756
						N560	2,90	44.8	802	2631	3,07	47.4	857	2812
						N165	3,02	46.6	813	2667	3,20	49.4	861	2825
9,0	139	HPBT	Norma	78,0	3.071	N150	2,28	35.2	704	2310	2,55	39.4	779	2555
						N550	2,50	38.6	743	2438	2,71	41.8	813	2667
						N160	2,73	42.1	738	2421	2,98	46.0	810	2656
						N560	2,88	44.4	753	2470	3,20	49.4	846	2777
						N165	3,00	46.3	765	2510	3,23	49.9	833	2732
9,0	139	Scenar	Lapua	80,0	3.150	N540	2,35	36.3	764	2507	2,53	39.0	819	2687
						N150	2,12	32.7	706	2316	2,28	35.2	761	2497
						N550	2,37	36.6	737	2418	2,59	40.0	805	2641
						N160	2,40	37.0	732	2402	2,67	41.2	790	2592
						N560	2,73	42.1	736	2415	3,06	47.2	826	2710
						N165	2,86	44.1	766	2513	3,10	47.8	833	2733
9,0	139	Scenar SJ	Lapua	80,0	3.150	N150	2,25	34.7	729	2392	2,48	38.3	785	2575
						N550	2,37	36.6	712	2336	2,61A	40.3A	799	2622
						N160	2,54	39.2	748	2454	2,80	43.3	795	2610
						N560	2,73	42.1	736	2415	3,06	47.3	826	2711
						N165	2,94	45.4	788	2585	3,12	48.1	841	2759
9,1	140	Naturalis	Lapua	75,0	2.953	N540	2,25	34.7	742	2434	2,47	38.1	796	2612
						N150	2,03	31.3	695	2280	2,25	34.7	752	2467
						N550	2,34	36.1	741	2431	2,59	40.0	803	2635
						N160	2,32	35.8	723	2372	2,66	41.1	790	2592
						N560	2,71	41.8	763	2503	2,96	45.7	824	2703
						N165	2,55	39.4	751	2464	3,00	46.3	813	2667

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 x 55 Swedish Mauser

cont.

Bullet			Type	Powder		Starting load			Maximum load					
Weight [g]	[grs]	Type/Name		Mfg	C.O.L. [mm]	[in.]	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
9,1	140	HPBT	Sierra	79,0	3.110	N150	2,35	36.3	703	2306	2,54	39.1	765	2511
						N550	2,58	39.8	749	2457	2,73	42.1	806	2644
						N160	2,81	43.4	759	2490	3,03	46.7	819	2687
						N560	2,93	45.2	779	2556	3,13	48.3	844	2770
						N165	3,00	46.3	766	2513	3,24	50.0	834	2735
9,3	144	FMJBT	Lapua	79,0	3.110	N150	2,04	31.5	659	2163	2,40	37.0	768	2520
						N160	2,64	40.7	717	2352	2,85	44.0	816	2677
						N560	2,91	44.8	756	2479	3,15	48.6	850	2789
						N165	2,70	41.7	720	2362	3,18	49.1	837	2746
						N170	3,08	47.5	715	2346	3,41C	52.6C	815	2674
						N570	3,11	48.0	750	2461	3,22F	49.7F	785	2575
10,0	155	HPBT	Sierra	79,0	3.110	N1								

6,5 x 55 SE / 6,5 x 55 SKAN

cont.

Bullet	7,8 g / 120 gr			Lapua GB547 Scenar-L			C.O.L. 77 mm / 3.031 inch								
Powder	Starting load						Maximum load								
Type	Weight		Velocity, barrel length [mm]				Weight		Velocity, barrel length [mm]						
	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]			
N135	2,08	32,1	739	2425	744	2441	752	2467	2,43	37,5	829	2720			
N140	2,18	33,6	761	2497	767	2516	774	2539	2,59	40,0	844	2769			
N540	2,32	35,8	800	2625	801	2628	807	2648	2,81	43,4	890	2920			
N150	2,31	35,6	751	2464	754	2474	761	2497	2,65	40,9	841	2759			
N550	2,62	40,4	816	2677	820	2690	827	2713	2,95	45,5	894	2933			
N160	2,84	43,8	772	2533	784	2572	791	2595	3,07	47,4	857	2812			
N560	3,03	46,8	810	2657	820	2690	828	2717	3,32	51,2	901	2956			
Bullet	8,0 g / 123 gr			Lapua GB489 Scenar			C.O.L. 80 mm / 3.150 inch								
Powder	Starting load						Maximum load								
Type	Weight		Velocity, barrel length [mm]				Weight		Velocity, barrel length [mm]						
	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]			
N140	2,20	34,0	750	2462	755	2477	761	2497	2,55	39,4	833	2734			
N540	2,47	38,1	788	2586	795	2607	803	2635	2,79	43,1	881	2892			
N150	2,24	34,6	741	2432	748	2454	757	2484	2,60	40,1	830	2724			
N550	2,67	41,2	805	2641	816	2676	830	2723	2,94	45,4	883	2895			
N160	2,71	41,8	763	2502	779	2557	802	2631	3,02	46,6	845	2773			
N560	3,04	46,9	801	2628	814	2669	830	2723	3,27	50,5	888	2913			
Bullet	8,8 g / 136 gr			Lapua GB546 Scenar-L			C.O.L. 80 mm / 3.150 inch								
Powder	Starting load						Maximum load								
Type	Weight		Velocity, barrel length [mm]				Weight		Velocity, barrel length [mm]						
	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]			
N540	2,39	36,9	736	2415	742	2434	749	2457	2,72	42,0	841	2759			
N150	2,29	35,3	711	2333	718	2356	726	2382	2,58	39,8	821	2694			
N550	2,57	39,7	757	2484	763	2503	769	2523	2,80	43,2	856	2808			
N160	2,73	42,1	741	2431	748	2454	755	2477	3,05	47,1	852	2795			
N560	2,9	44,8	786	2579	794	2605	801	2628	3,20	49,4	884	2900			
N165	3,02	46,6	779	2556	787	2582	795	2608	3,30C	50,9C	868	2848			
Bullet	9,0 g / 139 gr			Lapua GB458 Scenar			C.O.L. 80 mm / 3.150 inch								
Powder	Starting load						Maximum load								
Type	Weight		Velocity, barrel length [mm]				Weight		Velocity, barrel length [mm]						
	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	[m/s]	[fps]			
N150	2,12	32,7	696	2284	699	2295	704	2310	2,40	37,0	781	2563			
N550	2,37	36,6	738	2421	743	2438	750	2461	2,72	42,0	825	2705			
N160	2,41	37,2	723	2373	730	2395	735	2411	2,84	43,8	817	2679			
N560	2,87	44,3	771	2529	776	2546	783	2569	3,18	49,1	866	2842			
N165	2,86	44,1	758	2488	765	2508	773	2536	3,25	50,2	847	2777			
C = Compressed load															

6,5 - 284 Norma

Test barrel: 660 mm (26"), 1 in 9" twist
 Primers: Large Rifle
 Cases: Lapua, trim-to length 54,90 mm (2.161")

Bullet	Starting load			Maximum load								
Weight	Type	Powder	Weight	Velocity	Weight	Velocity						
[g]			[g]	[m/s]	[g]	[m/s]						
6,5	100	FMJ	Lapua	70	2.756	N150	2,71	41.8	872	2861	3,22	49.7
						N550	3,09	47.7	895	2936	3,48	53.7
						N160	3,08	47.5	855	2805	3,77	58.2
6,5	100	Scenar	Lapua	75	2.953	N150	2,79	43.1	910	2986	3,23	49.8
						N550	3,08	47.5	892	2927	3,48	53.7
						N160	3,10	47.8	865	2838	3,77	58.2

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 - 284 Norma

cont.

Bullet	Starting load			Maximum load								
Weight	Type/Name	Mfg	C.O.L.	Type	Weight	Velocity						
[g]	[grs]		[mm]	[in.]	[g]	[m/s]						
7,0	108	Scenar	Lapua	79,0	3.110	N550	2,97	45.8	920	3018	3,39	52.3
						N160	3,08	47.5	906	2972	3,49	53.9
						N560	3,47	53.5	927	3041	3,81	58.9
7,0	108	Scenar SJ	Lapua	79,0	3.110	N160	3,11	48.0	883	2897	3,73	57.6
						N560	3,51	54.2	911	2989	3,85	59.5
8,0	123	Scenar	Lapua	79,0	3.110	N160	2,59	40.0	795	2608	3,29	50.8
						N165	3,03	46.8	830	2723	3,65	56.4
						N560	3,28	50.6	867	2844	3,65	56.3
7,8	120	Scenar-L	Lapua	79,0	3.110	N550	2,83	43.7	822	2697	3,26	50.3
						N160	2,86	44.1	801	2628	3,53	54.5
						N560	3,32	51.2	831	2726	3,73	57.6
						N165	3,40	52.5	834	2736	3,80	58.6
8,0	23	Scenar SJ	Lapua	79,0	3.110	N160	2,94	45.4	833	2733	3,38	52.2
						N560	3,37	52.0	872	2861	3,77	58.2
						N165	3,35	51.7	859	2818	3,98	61.5
8,8	136	Scenar-L	Lapua	79,0	3.110	N550	2,75	42.4	770	2526	3,13	48.3
						N160	2,83	43.7	754	2474	3,38	52.2
						N560	3,22	49.7	795	2608	3,62	55.9
9,0	139	Scenar	Lapua	79,0	3.110	N160	2,80	43.2	772	2533	3,06	47.2
	</td											

.270 Winchester

Test barrel: 620 mm (24½"), 1 in 10" twist
 Primers: Large Rifle
 Cases: Remington, trim-to length 64,30 mm (2.531")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	Spitzer	Speer	80,0	3.150	N150	2,88	44,5	898	2945	3,42	52,8	998	3273
				N160		3,80	58,6	953	3127	4,27C	65,8C	1057	3468	
				N165		4,00	61,7	966	3170	4,53C	69,9C	1070	3509	
7,5	115	Match King	Sierra	83,5	3.287	N150	2,56	39,5	833	2733	2,94	45,4	924	3031
				N550		2,87	44,3	871	2858	3,18	49,1	954	3130	
				N160		2,98	46,0	844	2769	3,54	54,6	958	3143	
8,4	130	SP	Remington	82,0	3.228	N160	3,34	51,5	847	2779	3,76	58,0	940	3083
				N560		3,64	56,2	876	2873	3,97	61,3	955	3132	
8,4	130	SPBT	Speer	83,0	3.268	N165	3,54	54,6	850	2787	4,02	62,0	942	3089
8,8	135	HPBT	Sierra	83,0	3.268	N160	2,90	44,8	822	2697	3,66	56,5	929	3048
				N165		3,65	56,3	844	2769	3,90	60,2	927	3041	
				N560		3,62	55,9	876	2874	3,91	60,3	957	3140	
9,1	140	A-Frame	Swift	82,0	3.228	N550	2,63	40,6	758	2487	3,08	47,5	859	2818
				N560		3,12	48,1	789	2589	3,60	55,6	888	2913	
				N165		3,05	47,1	790	2592	3,59	55,4	867	2844	
9,1	140	TSX	Barnes	81,5	3.209	N550	2,44	37,7	737	2418	3,01	46,5	860	2822
				N560		3,12	48,1	798	2618	3,48	53,7	882	2894	
				N165		2,90	44,8	772	2533	3,42	52,8	862	2828	
9,7	150	Ballistic Tip	Nosler	83,5	3.287	N160	2,92	45,1	730	2395	3,39	52,3	842	2762
				N560		3,13	48,3	742	2434	3,66	56,5	870	2854	
				N165		3,10	47,8	734	2408	3,74	57,7	870	2854	
9,7	150	TSX	Barnes	82,0	3.228	N550	2,44	37,7	712	2336	2,93	45,2	821	2694
				N560		2,90	44,8	746	2448	3,36	51,9	847	2779	
				N165		2,71	41,8	713	2339	3,27	50,5	819	2687	
10,4	160	Partition	Nosler	84,6	3.331	N160	2,50	38,6	699	2293	2,89	44,6	781	2562
				N165		2,88	44,4	735	2411	3,31	51,1	811	2661	
				N560		3,01	46,5	745	2444	3,42	52,8	847	2779	

C = Compressed load

.270 Weatherby Magnum

Test barrel: 650 mm (25½"), 1 in 12 twist
 Primers: Large Rifle Magnum
 Cases: Remington, trim-to length 64,30 mm (2.531")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	PSP	Remington	79,0	3.110	N550	4,33	66,8	1037	3401	4,64	71,7	1117	3666
				N160		4,60	71,0	1043	3421	4,85	74,9	1108	3634	
				N165		5,08	78,4	1045	3428	5,38	83,0	1115	3658	
8,5	130	PSPCL	Remington	82,2	3.236	N160	4,31	66,5	939	3080	4,61	71,1	1001	3284
				N165		4,62	71,3	931	3055	4,93	76,0	997	3270	
				N560		4,71	72,7	947	3108	4,98	76,9	1004	3294	
8,7	135	HPBT	Sierra	83,0	3.268	N160	4,21	65,0	903	2964	4,43	68,3	965	3167
				N165		4,55	70,2	923	3029	4,70	72,5	989	3244	
				N560		4,61	71,2	956	3137	4,81	74,2	1013	3323	
9,7	150	Partition	Nosler	82,5	3.248	N165	4,34	67,0	877	2876	4,68	72,2	936	3072
				N560		4,38	67,6	900	2954	4,60	71,0	955	3134	
				N170		4,76	73,4	886	2906	5,11	78,8	955	3134	

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7 mm-08 Remington

Test barrel: 610 mm (24"), 1 in 9½" twist

Primers: Large Rifle
 Cases: Lapua, .308 Win. necked down, trim-to length 51,5 mm (2.028")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
7,8	120	SP	Sierra	69,5	2.736	N135	2,33	36,0	822	2697	2,66	41,1	915	3002
				N140		2,64	40,7	865	2838	2,90	44,8	934	3064	
				N150		2,71	41,8	861	2825	2,97	45,8	936	3071	
				N540		2,68	41,4	867	2844	2,95	45,5	956	3136	
8,4	130	HPBT	Sierra	70,6	2.780	N135	2,30	35,5	796	2612	2,48	38,3	855	2805
				N140		2,49	38,4	812	2664	2,71	41,8	882	2894	
				N150		2,62	40,4	825	2707	2,85	44,0	899	2949	
				N540		2,63	40,6	850	2789	2,83	43,7	918	3012	
9,1	140	Ballistic Tip	Nosler	69,6	2.740	N135	2,21	34,1	759	2490	2,42	37,3	826	2710
				N140		2,40	37,0	773	2536	2,66	41,1	852	2795	
				N150		2,55	39,4	791	2595	2,79	43,1	861	2825	
				N540		2,54	39,2	801	2628	2,77	42,7	877	2877	
9,7	150	Scenar-L	Lapua	71,0	2.795	N140	2,22	34,3	723	2372	2,44	37,7	792	2598
				N540		2,31	35,6	750	2461	2,54	39,2	823	2700	
				N150		2,23	34,4	731	2398	2,47	38,1	794	2605	
				N550		2,44	37,7	746	2448	2,71	41,8	833	2733	
9,7	150	TSX	Barnes	69,5	2.736	N540	2,42	37,3	741	2431	2,66	41,1	824	2703
				N550		2,60	40,1	740	2428	2,88	44,4	825	2707	
				N160		2,85	44,0	755	2477	3,05	47,1	807	2648	
9,7	150	MatchKing	Sierra	69,5	2.736	N140	2,26	34,9	728	2388	2,57	39,7	813	2667
				N150		2,36	36,4	737	2418	2,69	41,5	824	2703	
				N540		2,44	37,7	762	2500	2,69</td				

7 x 57

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
9,1	140	Ballistic Tip	Nosler	77,5	3.051	N140	2,58	39.7	736	2415	2,82	43.5	802	2630
						N150	2,65	40.9	747	2451	2,90	44.8	810	2657
10,4	160	SPBT	Sierra	77,5	3.051	N150	2,50	38.6	691	2267	2,76	42.7	754	2474
						N160	3,04	47.0	726	2381	3,26	50.3	793	2603
11,3	175	Mag-Tip	Speer	77,0	3.031	N160	2,76	42.5	659	2162	3,06	47.1	726	2383
						N165	2,94	45.4	666	2184	3,32	51.2	740	2429

7 x 57R

Test barrel: 550 mm (22"), 1 in 9½" twist

Primers: Large Rifle

Cases: RWS, trim-to length 56,80 mm (2.236")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
7,8	120	Spitzer	Sierra	76,5	3.012	N135	2,58	39.7	785	2574	2,79	43.1	857	2812
						N140	2,72	41.9	791	2594	2,97	45.8	870	2855
						N150	2,74	42.3	797	2613	3,00	46.3	873	2863
9,1	140	Ballistic Tip	Nosler	77,5	3.051	N140	2,47	38.1	707	2320	2,74	42.2	777	2549
						N150	2,53	39.0	718	2354	2,81	43.4	787	2581
10,4	160	Naturalis	Lapua	75,0	2.953	N140	2,17	33.5	643	2110	2,41	37.2	701	2300
						N150	2,08	32.1	603	1978	2,47	38.1	702	2303
						N540	2,26	34.9	645	2116	2,53	39.0	715	2346
10,4	160	SPBT	Sierra	77,5	3.051	N150	2,39	36.8	662	2171	2,66	41.0	731	2397
						N160	2,93	45.2	693	2272	3,19	49.3	774	2539
11,3	175	Mag-Tip	Speer	77,0	3.031	N160	2,63	40.6	629	2065	2,95	45.4	701	2298
						N165	2,78	42.8	631	2072	3,17	48.9	711	2333

7 x 64

Test barrel: 600 mm (23½"), 1 in 10" twist

Primers: Large Rifle

Cases: Lapua, trim-to length 63,80 mm (2.512")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
7,8	120	Ballistic Tip	Nosler	82,0	3.228	N150	2,94	45.4	863	2831	3,24	50.0	946	3104
						N540	3,03	46.8	888	2913	3,34	51.5	982	3222
						N550	3,16	48.8	884	2900	3,55	54.8	983	3225
						N160	3,52	54.3	892	2927	3,70C	57.1C	930	3051
9,1	140	A-Frame	Swift	81,4	3.205	N150	2,66	41.1	766	2513	3,10	47.8	856	2808
						N540	2,74	42.3	788	2585	3,15	48.6	887	2910
						N550	3,04	46.9	802	2631	3,32	51.2	889	2917
						N160	3,31	51.1	797	2615	3,60	55.6	889	2917
9,7	150	TSX	Barnes	83,8	3.299	N150	2,65	40.9	721	2365	2,99	46.1	813	2667
						N540	2,74	42.3	753	2470	3,06	47.2	846	2776
						N550	2,94	45.4	765	2510	3,24	50.0	855	2805
						N160	3,19	49.2	760	2493	3,61	55.7	861	2825
9,7	150	Partition	Nosler	83,8	3.299	N150	2,66	41.1	758	2487	3,09	47.7	843	2766
						N540	2,68	41.4	774	2539	3,14	48.5	871	2858
						N550	3,04	46.9	795	2608	3,33	51.4	871	2858
						N160	3,30	50.9	790	2592	3,59	55.4	874	2867
						N560	3,43	52.9	800	2625	3,76	58.0	888	2913
9,7	150	Scenar-L	Lapua	84	3.307	N150	2,64	40.7	757	2484	3,01	46.5	845	2772
						N540	2,71	41.8	779	2556	3,03	46.8	866	2841
						N550	2,92	45.1	787	2582	3,16	48.8	867	2844
						N160	3,22	49.7	794	2605	3,57	55.1	881	2890
10,1	156	Naturalis	Lapua	83,0	3.268	N150	2,60	40.1	736	2415	2,96	45.7	816	2677
						N550	2,81	43.4	750	2461	3,16	48.8	840	2756
						N160	3,19	49.2	764	2507	3,52	54.3	837	2746
						N560	3,33	51.4	747	2451	3,71	57.3	866	2841

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7 x 64

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
10,4	160	Accubond	Nosler	84,0	3.307	N150	2,56	39.5	731	2398	2,99	46.1	810	2657
						N540	2,64	40.7	746	2448	3,04	46.9	835	2740
						N550	2,92	45.1	759	2490	3,20	49.4	839	2753
						N160	3,27	50.5	767	2516	3,60C	55.6C	854	2802
11,3	174	TSX	Barnes	81,3	3.201	N540	2,44	37.7	655	2149	2,95	45.5	765	2510
						N550	2,78	42.9	675	2215	3,24	50.0	784	2572
						N160	3,04	46.9	676	2218	3,47	53.6	781	2562
11,3	174	Game King	Sierra	84	3.307	N540	2,57	39.7	718	2356	2,98	46.0	803	2635
						N550	2,84	43.8	733	2405	3,09	47.7	805	2641
						N160	3,12	48.1	737	2418	3,41	52.6	812	2664
						N165	3,40	52.5	752	2467	3,75C	57.9C	823	2700
11,5	177	TIG	Brenneke	82,3	3.240	N540	2							

7 mm Remington Magnum

cont.

Bullet				Powder	Starting load			Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]		
10,1	156	Naturalis	Lapua	N560	3,89	60.0	851	2792	4,35	67.1	948	3110
				N165	3,82	59.0	847	2779	4,32	66.7	931	3054
				N160	2,99	46.1	716	2349	3,42	52.8	806	2644
				N165	3,30	50.9	743	2438	3,93	60.6	852	2795
				N560	3,50	54.0	773	2536	3,90	60.2	879	2884
				N160	3,15	48.6	753	2470	3,76	58.0	859	2818
10,4	160	Naturalis	Lapua	N560	3,67	56.6	843	2766	4,03	62.2	943	3094
				N165	3,65	56.3	786	2579	4,08	63.0	868	2848
				N160	3,31	51.1	784	2572	3,99	61.6	880	2887
				N560	3,91	60.3	823	2700	4,45	68.7	925	3035
				N165	3,83	59.1	812	2664	4,41	68.1	909	2982
				N160	3,26	50.3	767	2516	3,86	59.6	862	2828
10,9	168	HPBT	Sierra	N560	3,75	57.9	811	2661	4,26	65.7	903	2963
				N165	3,61	55.7	788	2585	4,14	63.9	853	2799
				N170	3,78	58.3	778	2552	4,52	69.8	887	2910
				N160	3,09	47.7	737	2418	3,64	56.2	826	2710
				N560	3,66	56.5	791	2595	4,18	64.5	885	2904
				N165	3,41	52.6	746	2448	4,06	62.7	854	2802
11,3	175	SBT	Sierra	N170	3,73	57.6	761	2497	4,35	67.1	862	2828
				N160	2,78	42.9	678	2224	3,24	50.0	765	2510
				N560	3,10	47.8	728	2388	3,45	53.2	808	2651
				N165	2,87	44.3	679	2228	3,48	53.7	783	2569
				N170	3,12	48.1	678	2224	3,79	58.5	806	2644

7 mm Weatherby Magnum

Test barrel: 660 mm (26"), 1 in 9" twist

Primers: Large Rifle Magnum

Cases: Weatherby, trim-to length 64,50 mm (2.539")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]		
6,5	100	HP	Hornady	N160	4,76	73,5	1071	3512	5,10	78,7	1149	3770
				N560	4,98	76,8	1085	3561	5,30	81,8	1170	3839
				N160	4,52	69,8	989	3245	4,83	74,5	1057	3468
				N165	4,89	75,5	1003	3290	5,20	80,2	1072	3517
				N560	4,79	73,9	1009	3310	5,07	78,2	1079	3540
				N160	4,09	63,1	853	2799	4,39	67,7	912	2992
10,4	160	Spitzer	Sierra	N165	4,41	68,0	864	2834	4,69	72,4	924	3031
				N560	4,26	65,7	868	2846	4,53	69,9	927	3041
				N160	4,00	61,7	832	2730	4,23	65,3	879	2884
				N165	4,31	66,5	840	2755	4,51	69,6	888	2913
				N560	4,17	64,3	845	2771	4,42	68,2	909	2982

7 mm RUM

Test barrel: 660 mm (26"), 1 in 9" twist

Primers: Large Rifle Magnum

Cases: Remington, trim-to length 72.14 mm (2.840")

Bullet				Powder	Starting load			Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]		
7,8	120	Ballistic Tip	Nosler	N160	5,39	83,2	1015	3330	5,83	90,0	1107	3632
				N560	5,76	88,9	1020	3346	6,15	94,9	1123	3684
				N165	5,59	86,3	1046	3432	6,06	93,5	1143	3750
				N560	3,30	50,9	751	2464	4,54	70,1	904	2966
				N170	3,64	56,2	758	2487	4,72	72,8	890	2920
				N570	3,55	54,8	792	2598	4,95	76,4	934	3064
10,4	160	Naturalis	Lapua	N560	5,07	78,2	897	2943	5,51	85,0	978	3209
				N170	5,61	86,6	918	3012	5,96	92,0	997	3271
				N570	5,59	86,3	912	2992	6,07	93,7	1003	3291

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7 mm RUM

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]				
11,3	175	A-Frame	Swift	91,5	3,602	N560	4,82	74,4	853	2799	5,27	81,3	935	3068
				N170	5,26	81,2	880	2887	5,51	85,0	914	2999		
				N570	5,31	81,9	873	2864	5,82	89,8	955	3133		

.30 Carbine

Test barrel: 460 mm (18"), 1 in 10" twis

Primers: Small Rifle

Cases: Federal, trim-to length 32,60 mm (1.283")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]

.300 Savage

Test barrel: 600 mm (23½") 1 in 12" twist
Primers: Large Rifle
Cases: Remington, trim to-length 47,30 mm (1.862")

Bullet					Powder	Starting load				Maximum load				
Weight [g]		Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]		Velocity [m/s]		Weight [g]		Velocity [m/s]	
[grs]							[grs]		[fps]		[grs]		[fps]	
6,5	100	HP	Lapua	62,5	2.461	N120	2,19	33.9	878	2881	2,45	37.8	975	3199
						N130	2,41	37.1	912	2993	2,59	40.0	986	3235
						N133	2,59	39.9	894	2932	2,85	44.0	973	3192
8,1	125	TNT-HP	Speer	65,5	2.579	N120	2,06	31.8	764	2507	2,27	35.0	837	2746
						N130	2,21	34.1	794	2606	2,42	37.3	863	2831
						N133	2,53	39.1	822	2698	2,71	41.8	884	2900
9,7	150	Mega	Lapua	61,5	2.421	N130	1,89	29.2	684	2243	2,18	33.6	751	2464
						N135	2,24	34.6	706	2315	2,50	38.6	772	2533
						N140	2,44	37.6	719	2360	2,72	42.0	793	2602
10,7	165	SBT	Sierra	66,0	2.598	N133	2,20	33.9	690	2264	2,42	37.3	759	2490
						N135	2,35	36.2	700	2297	2,53	39.0	764	2507
						N140	2,46	37.9	713	2341	2,68	41.4	787	2582
12,0	185	Mega	Lapua	66,0	2.598	N135	2,15	33.2	631	2072	2,44	37.6	705	2313
						N140	2,30	35.5	649	2131	2,59	40.0	715	2346
						N540	2,36	36.4	644	2113	2,66	41.0	720	2362

.308 Winchester

Test barrel: 610 mm (24"), 1 in 12" twist
Primers: Large Rifle
Cases: Lapua, trim-to length 51,00 mm (2.008")

Bullet				Powder		Starting load				Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Weight [grs]	Velocity [fps]	Weight [g]	Weight [grs]	Velocity [m/s]	Velocity [fps]		
3,7	57	ALS ¹⁾	Lapua	67,0	2.638	N110	1,78	27.5	1061	3481	2,24	34.5	1217	3993
6,5	100	HPCE	Lapua	67,0	2.638	N110	1,32	20.4	711	2333	1,80	27.8	870	2854
						N120	1,98	30.6	812	2663	2,33	36.0	930	3051
						N130	2,18	33.7	852	2794	2,60	40.1	976	3203
						N133	2,63	40.6	918	3012	2,95F	45.5F	1023	3356
						N530	2,68	41.4	915	3002	3,01	46.5	1044	3425
						N135	2,47	38.1	865	2837	2,99	46.1	992	3255
7,1	110	HP	Sako	67,5	2.657	N120	2,32	35.8	844	2769	2,67	41.2	962	3157
						N130	2,52	38.9	862	2826	2,96	45.7	988	3242
						N133	2,73	42.1	874	2868	3,19	49.1	1009	3311
8,0	123	FMJ	Lapua	66,9	2.634	N120	2,08	32.1	812	2664	2,39	36.9	896	2940
						N130	2,26	34.9	782	2566	2,78	42.9	923	3028
						N133	2,62	40.4	858	2815	2,87	44.3	940	3084
						N530	2,59	40.0	850	2789	2,88	44.4	959	3146
						N135	2,72	42.0	830	2723	3,06F	47.2F	921	3022
8,1	125	Ballistic Tip	Nosler	70,0	2.756	N130	2,40	37.0	818	2684	2,79	43.0	935	3068
						N133	2,60	40.1	829	2721	3,00	46.3	951	3120
						N135	2,70	41.6	833	2732	3,17	48.9	958	3143
						N140	2,86	44.1	835	2739	3,23F	49.8F	936	3071
8,5	130	HP	Lapua	68,0	2.677	N135	2,58	39.7	782	2567	3,02	46.7	907	2975
						N140	2,75	42.4	786	2579	3,15	48.7	903	2963
9,7	150	Mega	Lapua	65,2	2.567	N135	2,35	36.3	747	2451	2,68	41.4	842	2762
						N140	2,35	36.3	715	2346	2,95	45.5	824	2703
						N540	2,64	40.7	726	2382	2,97	45.8	833	2733
9,7	150	SPBT	Sierra	70,0	2.756	N133	2,27	35.0	729	2391	2,86	44.1	863	2831
						N135	2,56	39.5	764	2505	2,96	45.7	871	2857
						N140	2,71	41.8	767	2516	3,05	47.1	858	2815
						N150	2,82	43.6	776	2545	3,23	49.9	878	2880
9,7	150	Lock Base	Lapua	70,0	2.756	N530	2,45	37.8	794	2605	2,76	42.6	892	2927
						N135	2,56	39.5	810	2657	2,83	43.7	885	2904
						N140	2,75	42.4	800	2625	2,90F	44.7F	853	2799
						N540	2,78	42.9	807	2648	3,00	46.3	901	2956
						N150	2,80	43.2	803	2635	2,93F	45.2F	835	2740
9,7	150	HPBT	Sierra	71,0	2.795	N140	2,62	40.4	752	2467	3,06	47.3	869	2851

308 Winchester

cont.

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.308 Winchester

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
11,3	175	Scenar-L	Lapua	71,0	2.795	N135	2,29	35.3	720	2362	2,50	38.6	786	2579
						N140	2,46	38.0	735	2411	2,68	41.4	803	2635
						N540	2,51	38.7	746	2448	2,75	42.4	822	2697
						N150	2,54	39.2	741	2431	2,73	42.1	804	2638
11,3	175	HPBT/VLD	Sierra/ Berger	71,0	2.795	N140	2,29	35.3	664	2177	2,68	41.4	762	2501
						N540	2,44	37.7	687	2253	2,79	43.1	788	2586
						N150	2,39	36.8	681	2236	2,82	43.5	784	2573
						N550	2,57	39.6	698	2290	2,97	45.8	802	2631
11,7	180	SP	Hornady	71,0	2.795	N135	2,33	36.0	661	2169	2,71	41.8	765	2510
						N140	2,47	38.1	669	2196	2,86	44.1	781	2561
						N150	2,48	38.3	677	2220	3,00	46.3	793	2601
						N550	2,09	32.2	591	1938	2,55	39.3	715	2346
11,7	180	XFB	Barnes	71,0	2.795	N540	2,60	40.1	707	2320	2,84	43.8	772	2533
						N550	2,63	40.6	703	2306	2,90	44.7	769	2523
						N150	2,75	42.4	727	2385	2,95	45.5	778	2552
						N550	2,84	43.8	716	2349	3,13	48.3	791	2595
12,0	185	Mega	Lapua	67,5	2.657	N135	2,39	36.9	673	2208	2,57	39.7	731	2398
						N140	2,53	39.0	675	2215	2,82	43.5	756	2480
						N540	2,63	40.6	707	2320	2,92	45.1	801	2628
						N550	2,76	42.6	685	2247	3,07	47.4	768	2520
12,0	185	FMJBT	Lapua	71,0	2.795	N135	2,33	36.0	667	2188	2,66	41.0	761	2495
						N140	2,44	37.6	675	2215	2,83A	43.7A	778	2551
						N540	2,54	39.2	712	2335	2,84	43.8	791	2595
						N150	2,57	39.7	728	2388	2,84	43.8	805	2641
12,0	185	Scenar	Lapua	71,0	2.795	N140	2,44	37.7	706	2316	2,69	41.5	778	2552
						N540	2,38	36.7	725	2379	2,76	42.6	801	2628
						N150	2,42	37.3	664	2179	2,72	42.0	785	2575
						N550	2,62	40.5	672	2203	3,04A	46.9A	795	2608
12,0	185	Scenar SJ	Lapua	71,0	2.795	N140	2,46	38.0	689	2259	2,77	42.7	776	2546
						N540	2,64	40.7	729	2392	2,88	44.4	865	2838
						N150	2,47	38.1	696	2283	2,80	43.2	782	2566
						N550	2,72	41.9	711	2331	3,06	47.2	811	2661
12,3	190	HPBT	Sierra	71,0	2.795	N140	2,42	37.3	677	2222	2,78	42.9	764	2508
						N540	2,44	37.6	672	2204	2,83	43.7	786	2579
						N150	2,49	38.4	676	2218	2,82	43.6	767	2516
						N550	2,63	40.6	695	2279	3,06	47.2	800	2624
13,0	200	SP	Speer	71,0	2.795	N140	2,28	35.2	609	1999	2,67	41.2	712	2335
						N150	2,24	34.5	604	1982	2,74	42.2	715	2344

A = Accuracy load C = Compressed load F = Full case

1) A muzzle velocity exceeding 1000 m/s (3300 fps) may lead to severe barrel fouling!

7,62 x 53R (7,62 Russian)

Testbarrel: 660 mm (26"), 1 in 10" twist

Primers: Large Rifle

Cases: Lapua, trim-to length 53,30 mm (2.098")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	HPCE	Lapua	68,0	2.677	N120	2,59	40.0	933	3061	2,88	44.4	1020	3346
						N130	2,80	43.2	956	3136	3,03	46.8	1036	3399
						N133	2,98	46.0	960	3150	3,20F	49.4F	1019	3343
						N130	2,81	43.3	883	2896	3,19	49.1	967	3171
8,0	123	FMJ	Lapua	68,5	2.697	N130	3,07	47.4	900	2954	3,41	52.6	978	3209
						N133	3,19	49.2	901	2956	3,50	54.0	984	3229
9,7	150	Mega	Lapua	70,9	2.791	N133	2,43	37.5	727	2384	2,83	43.6	826	2709
						N135	2,70	41.7	761	2497	3,05	47.1	851	2790
						N140	2,86	44.1	774	2540	3,19	49.2	862	2829

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7,62 x 53R (7,62 Russian)

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]</

7,5 x 55 Swiss GP31

Test barrel: 600 mm (23½"), 1 in 10" twist
 Primers: Large Rifle
 Cases: Norma, trim-to length 55,40 mm (2.181")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]	
10,0	155	Scenar	Lapua	75,5	2.972	N140	3,00	46.3	759	2490	3,18	49.1	811	2661
						N540	3,05	47.1	766	2513	3,25	50.1	842	2762
						N150	3,03	46.8	763	2503	3,22	49.7	815	2674
10,8	167	Scenar	Lapua	75,5	2.972	N140	2,78	42.9	700	2297	2,96	45.7	760	2493
						N540	2,65	40.9	700	2297	3,07	47.4	771	2530
						N150	2,78	42.9	703	2306	3,08	47.5	761	2497
12,0	185	Scenar	Lapua	75,5	2.972	N140	2,45	37.8	694	2277	2,71	41.8	710	2329
						N540	2,74	42.3	688	2257	2,87	44.3	722	2369
						N150	2,85	44.0	697	2287	2,93	45.2	723	2372

.30-06 Springfield

Test barrel: 620 mm (24½"), 1 in 10" twist
 Primers: Large Rifle
 Cases: Lapua, trim-to length 63,10 mm (2.484")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]	
3,7	57	ALS ¹	Lapua	79,0	3.110	N110	2,02	31.1	1075	3527	2,49	38.4	1217	3994
				79,8	3.142	N130	2,58	39.8	869	2851	3,15	48.6	998	3274
						N133	3,07	47.4	911	2989	3,49	53.9	1016	3333
6,5	100	HP	Lapua			N135	3,25	50.1	927	3041	3,66	56.5	1033	3389
						N140	3,50	54.0	926	3038	3,96	61.1	1044	3425
						N540	3,59	55.4	939	3081	4,08	63.0	1058	3471
7,1	110	RN	Hornady	74,0	2.913	N133	3,15	48.6	873	2864	3,48	53.7	983	3225
						N135	3,14	48.5	864	2835	3,47	53.5	964	3163
						N140	3,38	52.2	881	2890	3,74	57.7	977	3205
8,0	123	FMJ	Lapua	79,8	3.142	N130	2,61	40.3	838	2749	3,01	46.4	934	3064
						N133	2,95	45.5	825	2707	3,31	51.1	922	3025
						N135	3,19	49.2	852	2795	3,48	53.7	937	3074
8,0	123	FMJ	Lapua			N140	3,35	51.7	853	2799	3,73	57.6	952	3123
						N540	3,49	53.9	863	2831	3,83	59.1	958	3143
						N150	3,59	55.4	880	2887	3,91	60.3	976	3202
8,1	125	Ballistic Tip	Nosler	84,0	3.307	N135	3,10	47.8	865	2838	3,40	52.5	935	3068
						N140	3,31	51.1	878	2881	3,64	56.2	958	3143
						N540	3,49	53.9	880	2887	3,91	60.3	994	3261
8,5	130	HP	Lapua	84,0	3.307	N135	3,08	47.5	843	2766	3,50	54.0	952	3123
						N140	3,29	50.8	862	2828	3,79	58.4	979	3213
						N540	3,40	52.5	867	2844	3,87	59.7	994	3261
9,7	150	Lock Base	Lapua	84,0	3.307	N135	2,93	45.2	789	2589	3,23	49.8	851	2792
						N140	3,13	48.3	802	2631	3,45	53.2	872	2861
						N540	3,16	48.8	792	2598	3,54	54.6	882	2894
9,7	150	Mega	Lapua	76,9	3.028	N135	2,60	40.1	711	2333	3,09	47.7	835	2740
						N140	2,83	43.7	732	2402	3,32	51.2	857	2812
						N540	2,94	45.4	742	2434	3,47	53.5	893	2930
9,7	150	HPBT	Sierra	84,0	3.307	N140	2,86	44.1	777	2549	3,22	49.7	858	2815
						N550	3,12	48.1	801	2628	3,48	53.7	886	2907
						N550	3,12	48.1	801	2628	3,48	53.7	886	2907
9,7	150	HPBT	Sierra	84,0	3.307	N140	3,08	47.5	798	2618	3,42	52.8	871	2858
						N540	3,27	50.5	809	2654	3,64	56.2	906	2972
						N150	3,29	50.8	807	2648	3,65	56.3	895	2936
10,0	155	Scenar	Lapua	84,0	3.307	N140	2,78	42.9	755	2477	3,23	49.8	850	2789
						N150	2,79	43.0	767	2516	3,30	50.9	863	2831

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.30-06 Springfield

cont.

Bullet	Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Powder	Type	Weight [g]	Velocity [m/s]	Starting load	Maximum load
	[grs]							[grs]	[fps]	Weight [g]	Weight [g]
										N540	3,05
										N550	3,19
										N160	3,45
10,0	155	TAG	Brenneke	81,8	3.220	N150	2,89	44.6	760	2493	3,25
						N550	3,28	50.6	796	2612	3,52
						N160	3,43	52.9	784	2572	3,75C
10,1	156	SPBT	Sako	80,5	3.169	N135	2,97	45.8	776	2546	3,29
						N140	3,10	47.8	775	2543	3,42
						N150	3,18	49.1	781	2562	3,53
10,7	165	TOG	Brenneke	81,0	3.189	N150	2,50	38.6	682	2238	2,90
						N550	2,96	45.7	738	2421	3,33
						N160	2,90	4			

.300 H&H Magnum

Testbarrel: 610 mm (24"), 1 in 10" twist
 Primers: Large Rifle Magnum
 Cases: Winchester, trim-to length 72,20 mm (2.842")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]	
10,0	155	Scenar	Lapua	N150	3,76	58,0	888	2913	3,97	61,3	935
				N550	3,98	61,4	914	2999	4,26	65,8	971
				N160	4,28	66,0	909	2982	4,57	70,5	967
12,0	185	Scenar	Lapua	N160	3,95	60,9	820	2690	4,21	64,9	872
				N560	4,31	66,5	851	2792	4,59	70,9	908
				N165	4,35	67,1	843	2766	4,62	71,4	895
13,0	200	HPBT	Sierra	N160	3,87	59,7	792	2598	4,04	62,4	829
				N560	4,21	65,0	821	2694	4,42	68,1	864
				N165	4,24	65,4	813	2667	4,45	68,6	853
											2799

.300 WSM

Testbarrel: 620 mm (24½"), 1 in 10" twist
 Primers: Large Rifle Magnum
 Cases: Winchester, trim-to length 53,10 mm (2.091")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]	
6,5	100	HPCE	Lapua	N150	3,85	59,4	1026	3366	4,21	65,0	1107
				N540	3,91	60,3	1042	3419	4,29	66,2	1146
				N550	4,14	63,9	1027	3369	4,55	70,2	1079
8,0	123	FMJ	Lapua	N150	3,82	59,0	963	3159	4,10	63,3	1032
				N550	4,06	62,7	950	3117	4,39	67,7	1057
				N160	4,28	66,1	953	3127	4,70	72,5	1045
9,7	150	Mega	Lapua	N550	3,51	54,2	860	2822	4,00	61,7	956
				N160	3,75	57,9	849	2785	4,34	67,0	951
				N560	4,14	63,9	862	2828	4,60	71,0	969
9,7	150	Lock Base	Lapua	N550	3,74	57,7	882	2894	4,15	64,0	979
				N160	3,89	60,0	878	2881	4,50	69,4	978
				N560	4,36	67,3	886	2907	4,81	74,2	989
10,7	165	Scirocco	Swift	N550	3,77	58,2	862	2828	4,16	64,2	957
				N160	3,87	59,7	842	2762	4,33	66,8	937
				N560	4,23	65,3	858	2815	4,63	71,5	959
				N165	4,32	66,7	868	2848	4,74	73,1	962
10,9	167	Scenar	Lapua	N550	3,56	54,9	832	2730	3,97	61,3	922
				N160	3,49	53,9	792	2598	4,15	64,0	908
				N560	4,03	62,2	833	2733	4,48	69,1	931
11,0	170	Naturalis	Lapua	N160	3,51	54,2	790	2592	4,12	63,6	891
				N165	3,96	61,1	817	2680	4,50	69,4	901
				N560	3,92	60,5	811	2661	4,40	67,9	913
12,0	185	Mega	Lapua	N550	3,41	52,6	784	2572	3,83	59,1	867
				N160	3,35	51,7	752	2467	3,92	60,5	851
				N560	3,95	61,0	801	2628	4,33	66,8	881
12,0	185	Scenar	Lapua	N160	3,83	59,1	799	2621	4,22	65,1	882
				N560	4,11	63,4	814	2671	4,50	69,4	906
				N165	4,18	64,5	823	2700	4,62	71,3	911
13,0	200	Naturalis	Lapua	N160	3,56	54,9	733	2405	4,00	61,7	815
				N560	3,80	58,6	743	2438	4,30	66,4	838
				N165	3,90	60,2	758	2487	4,45	68,7	834
13,0	200	Mega	Lapua	N160	3,67	56,6	749	2457	4,15	64,0	837
				N560	3,98	61,4	772	2533	4,44	68,5	864
				N165	4,10	63,3	777	2549	4,56	70,4	866
											2841

.300 Winchester Magnum

Testbarrel: 620 mm (24½"), 1 in 10" twist
 Primers: Large Rifle Magnum
 Cases: Lapua, trim-to length 66,30 mm (2.610")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]	
7,1	110	SP	Hornady	N160	5,40	83,3	1063	3488	5,65	87,1	1122
8,0	123	FMJ	Lapua	N150	3,99	61,6	943	3094	4,53	69,9	1031
				N550	4,26	65,7	948	3110	4,72	72,8	1051
				N160	4,47	69,0	939	3081	5,05	77,9	1039
8,5	130	HP	Lapua	N160	4,99	77,0	964	3162	5,34	82,4	1041
9,7	150	Mega	Lapua	N160	3,79	58,5	815	2674	4,48	69,1	935
				N165	4,29	66,2	844	2769	5,25	81,0	951
				N560	4,76	73,5	880	2887	5,26	81,2	983
9,7	150	Lock Base	Lapua	N160	4,59	70,8	884	2900	5,08	78,4	982
				N165	5,10	78,7	900	2953	5,45	84,1	979
				N560	4,90	75,6	899	2949	5,29	81,6	994
9,7	150	Ballistic Tip	Nosler	N160	4,79	73,9	913	2994	5,01	77,3	986
				N165	5,20	80,2	940	3084	5,35C	82,6C	997
10,0	154	Scenar	Lapua	N160	4,54	70,1	862	2828	4,94	76,2	961
				N165	5,04	77,8	885	2904	5,25C	81,0C	938
10,9	167	Scenar	Lapua	N160	4,81	74,2	879	2884	5,29	81,6	983
				N560	4,70	72,4	880	2887	5,01	77,3	950
10,9	167	Scenar SJ	Lapua	N160	4,70	72,5	846	2776	5,06	78,1	939
				N165	5,02	77,5	892	2927	5,39C	83,2C	967
10,9	167	Scenar SJ	Lapua	N160	4,39	67,7	830	2723	4,83	74,5	919
				N560	4,77	73,6	844	2769	5,15	79,5	943
11,0	170	Lock Base	Lapua	N160	4,43	68,4	849	2785	4,82	74,4	936
				N560	4,80	74,1	851	2792	5,09	78,5	952
11,0	170	Naturalis	Lapua	N160	4,09	63,1	824	2703	4,63	71,5	914
				N165	4,32	66,7	831	2726	4,92	75,9	925
11,0	170	N558	Lapua	N560	4,43	68,4	848	2782	4,95	76,4	943
11,3	175	Scenar-L	Lapua	N160	4,38	67,6	812	2664	4,79	73,9	901
				N560	4,60	71,0	831	2726	5,06	78,1	929
11,7	180	Partition	Nosler	N160	4,52	69,8	843	2765	4,94	76,1	916
				N165	4,86	75,0	852	2795	5,26	81,1	925
11,7	180	Naturalis	Lapua								

.300 Winchester Magnum

cont.

Bullet				Powder	Starting load			Maximum load						
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]				
13,0	200	HPBT	Sierra	84,8	3.339	N170	4,05	62.4	743	2438	4,85	74.8	828	2717
				N560	3,95	60.9	770	2526	4,60	70.9	852	2795		
				N160	4,02	62.0	760	2495	4,56	70.3	835	2741		
				N165	4,15	64.0	768	2518	4,79	73.8	846	2774		
				N570	4,84	74.7	797	2615	5,31	81.9	891	2923		
				N165	4,29	66.2	723	2372	4,88	75.3	816	2677		
14,3	220	Scenar-L	Lapua	84,5	3.327	N560	4,34	67.0	751	2464	4,74	73.1	830	2723
				N170	4,63	71.5	734	2408	5,20	80.2	813	2667		
A = Accuracy load C = Compressed load				N570	5,04	77.8	782	2566	5,30	81.8	839	2753		

1) The cartridge overall length exceeds the CIP maximum.

.300 Weatherby Magnum

Test barrel: 660 mm (26"), 1 in 10" twist

Primers: Large Rifle Magnum

Cases: Weatherby, trim-to length 71,50 mm (2.815")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load						
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]				
8,1	125	Ballistic Tip	Nosler	90,0	3.543	N160	5,19	80.2	1046	3430	5,52	85.2	1104	3623
				N165	5,27	81.3	949	3113	5,59	86.3	1019	3343		
9,7	150	Ballistic Tip	Nosler	90,1	3.547	N160	4,88	75.2	945	3102	5,22	80.6	1003	3291
				N165	5,24	80.9	932	3057	5,57	85.9	984	3228		
10,7	165	SPBT	Speer	90,3	3.555	N160	4,85	74.8	923	3028	5,16	79.6	975	3200
				N165	5,24	80.9	932	3057	5,57	85.9	984	3228		
11,7	180	SP	Hornady	90,3	3.555	N160	4,66	71.9	875	2872	5,01	77.3	930	3050
				N165	5,04	77.7	888	2912	5,43	83.8	944	3098		
13,0	200	Naturalis	Lapua	88,5	3.484	N560	4,16	64.2	816	2677	4,44	68.5	842	2762
				N165	3,80	58.6	760	2493	4,29	66.2	800	2625		
13,0	200	HPBT	Sierra	90,3	3.555	N560	4,47	69.0	821	2694	4,81	74.2	872	2862
				N165	4,39	67.7	795	2609	4,87	75.1	858	2814		
13,0	200	HPBT	Sierra	90,3	3.555	N170	4,44	68.5	781	2562	5,11	78.9	859	2817

Test barrel: 690 mm (27"), 1 in 9 1/2 twist

Primers: Large Rifle Magnum

Cases: Lapua, trim-to length 68,90 mm (2.713")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load						
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]				
10,0	155	Scenar	Lapua	93,0	3.661	N160	4,89	75.5	973	3192	5,23	80.7	1023	3355
				N560	5,24	80.9	973	3192	5,73	88.4	1057	3468		
11,0	170	Lock Base	Lapua	93,0	3.661	N560	5,12	79.0	942	3091	5,49	84.7	1004	3293
				N170	5,66	87.3	939	3081	6,10	94.1	1003	3292		
12,0	185	Scenar	Lapua	93,0	3.661	N560	4,82	74.4	879	2884	5,31	81.9	954	3131
				N170	5,40	83.3	893	2930	5,89	90.9	962	3158		
13,0	200	HPBT	Sierra	93,0	3.661	N170	5,09	78.5	851	2792	5,56	85.8	915	3003
				24N41	5,56	85.8	866	2841	6,01	92.8	928	3044		
14,3	220	HPBT	Sierra	93,0	3.661	24N41	5,10	78.7	804	2638	5,67	87.4	875	2871
				20N29	6,06	93.5	856	2808	6,45	99.6	908	2980		

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.300 Remington Ultra Magnum

Test barrel: 660 mm (26"), 1 in 10" twist

Primers: Large Rifle Magnum

Cases: Remington, trim-to length 72,10 mm (2.839")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load							
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]					
10,0	155	Scenar	Lapua	89,5	3.524	N160	5,29	81.6	957	3140	5,80	89.5	1044	3425	
				N560	5,60	86.4	865	2838	6,09	94.0	1067	3501			
				N165	5,60	86.4	952	3123	6,19	95.5	1052	3451			
				10,7	165	Partition	Nosler	4,97	76.7	896	2940	5,64	87.0	980	3214
				N560	5,39	83.2	902	2959	6,13	94.5	1027	3371			
				N165	5,57	85.9	919	3015	6,12	94.4	1009	3311			
10,85	167	Scenar	Lapua	90,0	3.543	N560	5,29	81.6	925	3035	5,95	91.8	1029	3376	
				N165	5,05	77.9	882	2894	6,10	94.1	1007	3304			
				N170	5,37	82.9	895	2936	6,48	100.0	1011	3317			
11,0	170	Lock Base	Lapua	90,0	3.543	N560	4,73	73.0	899	2949	5,74	88.6	1006	3301	
				N165	4,56	70.4	851	2792	5,73	88.4	976	3202			
				N170	5,02	77.5	865	2838	6,36	98.1	992	3255			
11,7	180	XFB	Barnes	89,5	3.524	N165	4,52	69.7	833	2733</					

7,62 x 39

Test barrel: 415 mm (16"), 1 in 9½ twist
 Primers: Large Rifle
 Cases: Lapua, trim-to length 38,50 mm (1.516")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
3,7	57	ALS	Lapua	N110	55,7	2,193	1,56	24,1	925	3035
6,5	100	HP	Lapua	N110	55,4	2,181	1,22	18,8	685	2247
				N120			1,65	25,5	688	2257
8,0	123	FMJ	Lapua	N120	55,7	2,193	1,60	24,7	663	2175
8,1	125	Mega	Lapua	N120	52,4	2,063	1,55	23,9	658	2159
				N130			1,68	25,9	677	2221
							1,79	27,6	728	2388

.303 British

Test barrel: 600 mm (23½"), 1 in 10" twist
 Primers: Large Rifle
 Cases: Remington, trim-to length 56,20 mm (2.213")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
3,7	57	ALS ¹⁾	Lapua	N110	73,3	2,886	1,68	25,9	981	3219
8,0	123	FMJ	Lapua	N120	73,3	2,886	2,18	33,6	819	2687
				N130			2,39	36,9	840	2756
9,7	150	Mega	Lapua	N130	70,5	2,776	2,58	39,8	858	2815
				N133			2,38	36,7	831	2726
11,3	174	HPBT	Sierra	N135	78,0	3,071	2,29	35,3	711	2333
				N140			2,49	38,4	725	2379
11,7	180	Spitzer	Sierra	N140	78,0	3,071	2,57	39,7	728	2388
				N540			2,15	33,2	664	2178
				N135			2,33	36,0	683	2241
				N140			2,48	38,3	697	2287
				N540			2,70	41,7	758	2487

¹⁾ A muzzle velocity exceeding 1000 m/s (3300 fps) may lead to severe barrel fouling!

8 x 57 IS (8 mm Mauser)

Test barrel: 620 mm (24½"), 1 in 9½" twist
 Primers: Large Rifle
 Cases: Lapua, trim-to length 56,80 mm (2.236")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
8,1	125	SP	Hornady	N130	74,0	2,913	2,80	43,2	874	2867
				N133			3,14	48,5	883	2897
				N135			3,22	49,7	882	2894
9,7	150	Spitzer	Speer	N135	76,0	2,992	2,97	45,8	801	2628
				N140			3,13	48,3	799	2621
10,4	160	TSX	Barnes	N135	77,0	3,031	2,67	41,2	752	2467
				N140			2,87	44,3	767	2516
				N540			3,01	46,5	782	2566
11,0	170	SP	Speer	N135	77,0	3,031	2,86	44,1	748	2454
				N140			2,99	46,1	747	2451
				N150			3,13	48,3	761	2497
11,7	180	Naturalis	Lapua	N135	81,0	3,189	2,70	41,7	730	2395
				N140			2,87	44,3	743	2438
				N540			2,89	44,6	747	2451
				N150			2,89	44,6	744	2441
11,7	181	E-Tip	Nosler	N135	77,0	3,031	2,58	39,8	712	2336
				N140			2,77	42,7	719	2359
				N540			2,78	42,9	718	2356
				N150			2,90	44,8	735	2411
11,7	181	TOG	Brenneke	N140	77,0	3,031	2,84	43,8	705	2313
				N150			2,93	45,2	723	2372
				N540			2,93	45,2	746	2448

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

8 x 57 IS (8 mm Mauser)

cont.

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
12,8	198	TIG	Brenneke	77,0	3,031	N140	2,82	43,5	697	2287
				N150		2,93	45,2	708	2323	3,20
				N540		2,91	44,9	715	2346	3,19
13,0	200	Accubond	Nosler	79,1	3,114	N150	2,79	43,1	693	2274
				N540		2,75	42,4	701	2300	3,00
				N550		2,97	45,8	713	2339	3,33
				N160		3,32	51,2	706	2316	3,50
13,0	200	TSX	Barnes	77,2	3,039	N150	2,79	43,1	679	2228
				N540		2,77	42,7	677	2221	3,11
				N550		3,10	47,8	701	2300	3,40
13,0	200	Spitzer	Speer	79,5	3,130	N140	2,77	42,7	661	2169
				N150		2,86	44,1	680	2231	3,19
				N160		3,27	50,5	681	2234	3,64

8 x 57 IRS

Test barrel: 620 mm (24½"), 1 in 9½" twist

Primers: Large Rifle

Cases: Lapua, trim-to length 56,80 mm (2.236")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
9,7	150	Spitzer	Speer	N140	75,0	2,953	3,14	48,5	797	2615
				N540		3,12	48,1	793	2602	3,52
				N150		2,83	43,7	712	2336	3,08
11,7	180	Naturalis	Lapua	N135	79,5	3,130	2,47	38,1	702	2303
				N559		2,63	40,6	711	2333	2,83
				N160		2,63	40,6	717	2352	2,83
12,8	198	TIG	Brenneke	77,0	3,031	N140	2,80	43,2	708	2323
				N540		2,93	45,2	721	2365	3,07

.338 Winchester Magnum

Test barrel: 620 mm (24½"), 1 in 10" twist

Primers: Large Rifle Magnum

Cases: Lapua, trim-to length 63,30 mm (2.492")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]

<tbl_r cells="11" ix="5" maxc

.338 Winchester Magnum

cont.

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
19,4	300	HPBT	Sierra	84,8	3.339	N160	4,06	62,7	692	2270
				N560	4,20	64,7	700	2295	4,66	68,3
19,4	300	RNSP	Woodleigh	83,5	3.287	N160	3,58	55,2	626	2054
				N560	3,92	60,5	658	2159	4,10	63,3
				N165	3,92	60,5	637	2090	4,46	68,8
F = Case full				¹⁾ The cartridge overall length exceeds the CIP maximum.						

.338 Lapua Magnum

Test barrel: 700 mm (27½"), 1 in 10" twist

Primers: Large Rifle Magnum

Cases: Lapua, trim-to length 69,00 mm (2.714")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
13,0	200	SP	Hornady	91,0	3.583	N160	5,81	89,6	926	3038
				N165	6,24	96,3	935	3068	6,66	102,8
14,6	225	SP	Hornady	91,0	3.583	N160	5,07	78,3	830	2723
				N560	5,35	82,6	865	2838	5,86	90,5
				N165	5,40	83,2	839	2753	6,01	92,8
				N170	5,75	88,8	847	2779	6,33	97,6
15,0	231	Naturalis	Lapua	90,5	3.563	N160	4,73	73,0	793	2602
				N560	5,19	80,1	817	2680	5,75	88,7
				N165	5,00	77,2	797	2615	5,80	89,5
16,2	250	Lock Base	Lapua	91,5	3.602	N560	5,04	77,8	781	2562
				N165	4,89	75,5	781	2562	5,71	88,1
				N170	5,36	82,7	789	2589	6,23	96,1
				N570	5,60	86,4	830	2723	6,22	96,0
16,2	250	Scenar	Lapua	93,5	3.681	N560	4,94	76,2	778	2552
				N165	4,95	76,4	782	2566	5,61	86,6
				N170	5,50	84,9	797	2615	6,17	95,2
16,2	250	A-Frame	Swift	88,8	3.496	N560	4,41	68,1	753	2470
				N165	4,48	69,1	737	2418	5,40	83,3
				N570	5,26	81,2	795	2608	6,05	93,4
18,5	285	TSX	Barnes	93,0	3.661	N560	4,12	63,6	684	2244
				N170	4,30	66,4	654	2146	5,20	80,2
				N570	4,70	72,5	728	2388	5,31	81,9
18,5	285	HPBT	Hornady	93,5	3.681	N560	4,93	76,1	759	2490
				N165	4,81	74,2	733	2405	5,49	84,7
				N170	5,25	81,0	741	2431	5,96	92,0
				N570	5,44	84,0	781	2562	6,07	93,7
19,4	300	Scenar	Lapua	93,5	3.681	N165	4,47	69,0	685	2247
				N560	4,64	71,6	709	2326	5,33	82,3
				N170	4,90	75,6	712	2336	5,74	88,6
				N570	5,19	80,1	732	2402	5,99	92,4
19,4	300	HPBT	Berger	93,5	3.681	24N41	5,43	83,8	729	2392
				N560	4,31	66,5	688	2257	5,05	77,9
				N170	4,10	63,3	660	2165	5,10	78,7
				N570	4,50	69,4	707	2320	5,24	80,9
19,4	300	HPBT	Sierra	91,5	3.602	N165	4,57	70,5	695	2281
				N560	4,70	72,5	722	2370	5,37	82,8
				N170	5,15	79,4	719	2360	5,86	90,4
				N570	5,39	83,2	776	2546	5,92	91,3
				24N41	5,52	85,2	735	2410	6,28	96,8
										2653

9,3 x 62

Test barrel: 580 mm (22¾"), 1 in 14" twist

Primers: Large Rifle

Cases: Lapua, trim-to length 61,80 mm (2.433")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
14,3	220	Naturalis	Lapua	82,0	3.228	N530	3,01	46,4	687	2254
				N135	2,95	45,5	662	2172	3,67	56,6
				N140	3,49	53,9	733	2405	3,88	59,9
14,6	225	TAG	Brenneke	82,0	3.228	N530	3,16	48,8	718	2356
				N540	3,62	55,9	745	2444	4,04	62,3
				N150	3,61	55,7	737	2418	3,97	61,3
16,2	250	Naturalis	Lapua	83,4	3.283	N140	3,44	53,1	692	2270
				N540	3,40	52,5	702	2303	3,84	59,3
				N150	3,53	54,5	701	2300	3,81	58,8
16,2	250	AccuBond	Nosler	82,0	3.228	N530	2,99	46,1	678	2224
				N140	3,37	52,0	693	2274	3,73	57,6
				N540	3,46	53,4	701	2300	3,98	61,4
17,5	270	Naturalis	Lapua	82,5	3.248	N135	2,80	43,2	642	2106
				N140	3,39	52,3	673	2208	3,70	57,1
				N540	3,52	54,3	679	2228	3,77	58,2
18,5	285	Mega	Lapua	82,2	3.236	N135	2,85	44,0	605	1985
				N140	3,00	46,3	614	2014	3,39	52,3
				N540	3,05	47,1	607	1991	3,50	54,0
				N150	3,17	48,9	627	2057	3,60	55,6
18,5	286	TSX	Barnes	82,5	3.248	N150	2,83	43,7	559	1834
				N540	3,12	48,1	607	1991	3,47	53,6
				N550	2,88	44,4	534	1752	3,94	60,8
19,0	293	TUG	Brenneke	82,0	3.228	N150	3,20	49,4	619	2031
				N540	3,31	51,1	635	2083	3,57	55,1
				N550	3,50	54,0	638	2093	3,89	60,0
19,4	299	A-Frame	Swift	79,9	3.146	N150	2,89	44,6	569	1867
				N540	2,92	45,1	582	1909	3,29	50,8
				N550	3,13	48,3	590	1936	3,50	54,0
20,7	320	RNSP	Woodleigh	82,0	3.228	N540	3,45	53,2	630	2067
				N150	3,50	54,0	627	2057	3,73	57,6
				N550	3,70	57,1	636	2087	4,04	62,3

9,3 x 66 Sako

Test barrel: 630 mm (24¾"), 1 in 14" twist

Primers: Large Rifle

Cases: Sako, trim-to length 65,80 mm (2.591")

||
||
||

9,3 x 74R

Test barrel: 610 mm (24"), 1 in 14" twist
 Primers: Large Rifle
 Cases: RWS, trim-to length 74,50 mm (2.933")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
12,5	193	JFP	S&B	88,9	3.500	N120	2,98	46.0	744	2441	3,33	51.4	810	2656
						N130	3,42	52.8	791	2595	3,66	56.5	837	2746
14,3	220	Naturalis	Lapua	94,4	3.717	N530	3,04	46.9	708	2323	3,40	52.5	782	2566
						N135	3,02	46.6	702	2303	3,50	54.0	780	2559
						N140	3,39	52.3	721	2365	3,88	59.9	806	2644
15,0	231	SP	Norma	92,1	3.626	N140	3,72	57.4	718	2356	4,29	66.2	810	2656
16,2	250	Naturalis	Lapua	94,0	3.701	N135	2,98	46.0	676	2218	3,30	50.9	731	2398
						N140	3,11	48.0	686	2251	3,46	53.4	740	2428
						N540	3,15	48.6	690	2264	3,61	55.7	759	2490
16,6	256	SP	Sako	92,2	3.630	N140	3,50	54.0	654	2146	4,00	61.8	751	2463
17,5	270	Naturalis	Lapua	94,0	3.701	N135	3,10	47.8	649	2129	3,30	50.9	706	2316
						N140	3,30	50.9	656	2152	3,75	57.9	716	2349
						N540	3,48	53.7	655	2149	3,83	59.1	723	2372
18,5	285	Mega	Lapua	92,2	3.630	N135	2,80	43.2	576	1890	3,43	52.9	665	2182
						N140	3,45	53.2	636	2087	3,78	58.3	694	2277
						N540	3,24	50.0	618	2028	3,78	58.3	701	2300
19,0	293	TUG	RWS	95,5 ¹⁾	3.760	N140	3,42	52.7	637	2088	3,72	57.4	695	2281
19,4	300	A-Frame	Swift	92,2	3.630	N135	2,70	41.7	547	1795	2,94	45.4	593	1946
						N140	2,90	44.7	562	1844	3,21	49.5	613	2011
						N540	3,04	46.9	575	1886	3,40	52.5	636	2087
20,7	320	RNSP	Woodleigh	94,0	3.701	N135	2,90	44.7	544	1785	3,18	49.1	601	1972
						N140	3,08	47.5	558	1831	3,37	52.0	610	2001
						N540	3,15	48.6	571	1873	3,48	53.7	630	2067

¹⁾ The cartridge overall length exceeds the CIP maximum.

.375 H&H Magnum

Test barrel: 620 mm (24½"), 1 in 12" twist
 Primers: Large Rifle Magnum
 Cases: Remington, trim-to length 72,20 mm (2.842")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
15,2	235	Spitzer	Speer	91,0	3.583	N140	4,55	70,2	816	2677	4,91	75,8	879	2884
						N540	4,11	63,4	729	2392	5,18	79,9	890	2920
						N150	4,75	73,3	834	2736	5,10	78,7	886	2907
16,2	250	SBT	Sierra	91,0	3.583	N540	4,44	68,5	797	2615	4,82	74,4	856	2808
						N150	4,52	69,7	799	2621	4,87	75,1	852	2795
17,5	270	XFB	Barnes	91,0	3.583	N140	3,90	60,2	635	2083	4,55	70,2	787	2582
						N540	4,20	64,8	727	2385	4,76	73,4	813	2667
						N150	4,25	65,6	723	2372	4,71	72,7	796	2612
17,5	270	SP	Speer	91,0	3.583	N140	4,00	61,7	718	2356	4,57	70,5	805	2641
						N540	4,32	66,7	767	2516	4,71	72,7	825	2707
						N150	4,36	67,3	769	2523	4,87	75,1	830	2723
17,5	270	RNSP	Woodleigh	91,0	3.583	N135	3,85	59,4	707	2320	4,27	65,9	771	2530
						N540	4,45	68,7	766	2513	4,85	74,8	827	2713
						N150	4,20	64,8	735	2411	4,70	72,5	799	2621
18,5	285	Grand Slam	Speer	91,0	3.583	N140	3,90	60,2	665	2182	4,41	68,0	784	2572
						N540	4,22	65,1	732	2402	4,60	71,0	790	2592
						N150	4,21	65,0	733	2405	4,69	72,4	792	2598
19,4	300	A-Frame	Swift	91,0	3.583	N140	3,75	57,9	657	2156	4,27	65,9	736	2415
						N540	4,02	62,0	692	2270	4,34	67,0	743	2438
						N150	3,70	57,1	650	2133	4,24	65,4	726	2382

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.416 Rigby

Test barrel: 620 mm (24½"), 1 in 12" twist
 Primers: Large Rifle Magnum
 Cases: Norma, trim-to length 73,40 mm (2.890")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
22,7	350	A-Frame	Swift	92,0	3.622	N160	5,45	84,1	679	2228	5,95	91,8	736	2415
						N560	5,73	88,4	685	2247	6,02	92,9	728	2388
						N165	5,55	85,6	682	2238	6,25	96,4	747	2451
25,9	400	XFB	Barnes	94,5	3.720	N160	4,70	72,5	599	1965	5,40	83,3	660	2165
						N560	5,10	78,7	622	2041	5,43	83,8	661	2169
						N165	5,83	90,0	631	2070	5,97	92,1	662	2172
25,9	400	A-Frame	Swift	92,0	3.622	N160	4,85	74,8	611	2005	5,36	82,7	672	2205
						N560	5,00	77,2	616	2021	5,54	85,5	660	2165
						N165	5,45	84,1	651	2136	5,91	91,2	698	2290
26,6	410	RNSP	Woodleigh	92,5	3.642	N160	5,43	83,8	637	2090	5,80	89,5	695	2280
						N560	5,86	90,4	655	2149	6,28	96,9	711	2333
						N165	5,93	91,5	660	2165	6,42	99,1	720	2362
29,2	450	RNSP	Woodleigh	94,5	3.720	N160	5,20	80,2	614	2014	5,67	87,5	663	2175
						N560	5,70	88,0	633	2077	6,14	94,7	680	2231
						N165	5,83	90,0	631	2070	6,17	95,2	682	2238

.444 Marlin

Test barrel: 560 mm (22"), 1 in 38" twist
 Primers: Large Rifle
 Cases: Remington, trim-to length 56,30 mm (2.216")

|
<th
| |

.458 Winchester Magnum

Test barrel: 635 mm (25"), 1 in 14" twist
 Primers: Large Rifle Magnum
 Cases: Winchester, trim-to length 63,30 mm (2.492")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
22,7	350	RN	Hornady	74,9	2.949	N120	4,13	63,7	712	2336	4,53	69,9	748	2454
						N130	4,46	68,8	730	2395	4,80	74,1	773	2536
						N133	4,72	72,8	730	2395	4,90F	75,6F	756	2480
25,9	400	A-Frame	Swift	82,0	3.228	N130	4,30	66,3	674	2211	4,55	70,2	710	2329
						N530	4,90	75,6	691	2267	5,10F	78,7F	722	2369
						N135	4,80	74,1	677	2221	4,90F	75,6F	692	2270
25,9	400	XFB	Barnes	83,0	3.268	N130	4,00	61,7	631	2070	4,36	67,3	688	2257
						N530	4,50	69,4	645	2116	4,70F	72,5F	674	2211
						N135	4,30	66,3	625	2051	4,42F	68,2F	644	2113
32,4	500	RN	Hornady	84,0	3.307	N130	3,60	55,5	557	1827	4,11	63,4	623	2044
						N133	3,85	59,4	564	1850	4,52	69,7	645	2116
						N530	4,20	64,8	589	1932	4,76	73,4	655	2149

F = Case full

.50 Browning

Test barrel: 1140 mm (45"), 1 in 16½" twist
 Primers: CCI35
 Cases: IMI, trim-to length 99,10 mm (3.902")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
41,9	647	FMJBT	Speer	137,5	5.413	N170	13,03	201,1	801	2629	14,76	227,8	894	2932
						24N41	13,86	213,8	819	2688	14,72	227,2	888	2915
						20N29	15,53	239,7	836	2744	16,61	256,3	922	3024
45,4	700	Solid	Barnes	137,5	5.413	24N41	13,69	211,2	808	2652	15,00	231,5	887	2910
						20N29	15,27	235,6	819	2687	16,61	256,3	908	2978
48,6	750	A-MAX	Hornady	137,5	5.413	N170	12,31	190,0	759	2490	13,99	215,8	842	2763
						24N41	12,97	200,2	764	2508	14,13	218,0	843	2765
						20N29	14,59	225,2	779	2556	15,97	246,4	862	2829
48,6	750	Bullex-N	Lapua	138,0	5.433	24N41	13,83	213,4	798	2618	14,93	230,4	865	2838
						20N29	15,57	240,3	826	2710	16,58	255,9	895	2936
48,6	750	Solid	Barnes	137,5	5.413	24N41	13,26	204,6	768	2520	14,54	224,4	858	2815
						20N29	14,64	226,0	782	2565	16,23	250,5	871	2857
51,8	800	Bullex-N	Lapua	137,5	5.413	24N41	12,93	199,5	756	2480	14,23	219,6	826	2710
						20N29	14,95	230,7	796	2612	15,79	243,7	857	2812
51,8	800	Solid	Barnes	137,5	5.413	24N41	11,79	181,9	722	2369	12,84	198,1	790	2592
						20N29	14,19	219,1	779	2557	15,88	245,0	850	2788
55,1	850	Solid	Barnes	137,5	5.413	24N41	12,34	190,5	716	2349	13,50	208,3	784	2573
						20N29	13,91	214,7	746	2447	15,42	238,0	828	2716

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

Handgun Reloading Data

Disclaimer

All of this reloading information has been provided by Nammo Lapua Oy. The data given here were obtained in laboratory conditions following strictly the CIP (Commission International Permanente) June 13, 1990 and November 9, 1993 rules. The listed maximum loads have been determined according to the respective CIP/ SAAMI maximum pressure specification, whichever is lower.

These test methods have been deemed to be safe throughout the world. Pressure is measured at the case mouth or from inside the case according to the CIP.

DO NOT ATTEMPT ANY EXTRAPOLATIONS. PLEASE FOLLOW THE DATA AS WRITTEN.

IT IS A MUST FOR EVERY RELOADER TO READ THE RELOADING SAFETY RULES ON THE PAGES 16 AND 17 OF THIS GUIDE.

7 mm TCU

Test barrel: 360 mm (14"), 1 in 10" twist

Primers: Small Rifle

Cases: Necked-up Lapua .223 Rem., trim-to length 44,50 mm (1.752")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]
6,5	100	HP	Hornady	62,5	2.461	N120	1,48	22,8	667	2188	1,64	25,3	744	2441
						N130	1,62	25,0	672	2205	1,79	27,6	753	2470
						N133	1,77	27,3	695	2280	1,96	30,2	774	2539
7,8	120	SSSP	Hornady	63,5	2.500	N120	1,32	20,4	606	1988	1,45	22,4	655	2149
						N130	1,45	22,4	610	2001	1,61	24,8	673	2208
						N133	1,62	25,0	630	2067	1,81	27,9	701	2300
8,4	130	Spitzer	Speer	65,0	2.559	N120	1,24	19,1	542	1778	1,38	21,3	596	1955
						N130	1,40	21,6	573	1880	1,55	23,9	626	2054
						N133	1,46	22,5	576	1890	1,62	25,0	633	2077
9,7	150	SBT	Sierra	65,0	2.559	N120	1,17	18,1	513	1683	1,30	20,1	562	1844
						N130	1,31	20,2	535	1755	1,45	22,4	586	1923
						N133	1,38	21,3	542	1778	1,53	23,6	599	1965
10,4	160	SBT	Sierra	66,0	2.598	N120	1,12	17,3	480	1575	1,25	19,3	531	1742
						N130	1,26	19,4	505	1657	1,41	21,8	558	1831
						N133	1,31	20,2	511					

7 mm BR Remington

cont.

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]	
9,1	140	Ballistic Tip	Nosler	60,3	2.374	N120	1,45	22.4	595	1954	1,58
				N130	1,62	25.0	612	2006	1,73	26.7	661
				N133	1,71	26.3	623	2044	1,84	28.4	671
9,7	150	Ballistic Tip	Nosler	60,3	2.374	N120	1,42	21.9	576	1890	1,54
				N130	1,54	23.8	589	1931	1,67	25.8	635
				N133	1,62	25.1	595	1952	1,77	27.3	642
				N135	1,75	27.0	606	1988	1,87	28.9	650
10,4	160	HPBT	Sierra	59,7	2.350	N120	1,30	20.1	539	1770	1,42
				N130	1,42	21.9	559	1834	1,55	23.9	602
				N133	1,56	24.1	575	1886	1,69	26.1	619
				N135	1,67	25.8	588	1929	1,79	27.6	630
				N135	1,67	25.8	588	1929	1,79	27.6	630
											2067

7 mm GJW

Test barrel: 380 mm (15"), 1 in 8" twist

Primers: Small Rifle

Cases: Munitionsfabrik Thun, trim-to length 48,80 mm (1.920")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]	
9,7	150	Ballistic Tip	Nosler	75,0	2.953	N130	1,58	24.4	613	2013	1,67
				N133	1,65	25.5	614	2013	1,74	26.8	644
				N135	1,78	27.5	629	2065	1,86	28.7	658
10,9	168	HPBT	Sierra	75,0	2.953	N130	1,54	23.7	583	1913	1,63
				N133	1,62	25.1	587	1927	1,71	26.4	611
				N135	1,76	27.1	605	1984	1,83	28.2	631
				N140	1,83	28.2	607	1991	1,91	29.5	636
											2087

7,62 x 25 Tokarev

Test barrel: 150 mm (6"), 1 in 10" twist, groove calibre 7,85 mm (0.309")

Primers: Large Pistol

Cases: Fiocchi 7,63 Mauser, trim-to length 24,80 mm (0.976")

NOTE: FOR FIREARMS CHAMBERED FOR THE 7,62 x 25 TOKAREV CARTRIDGE ONLY.

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]	
3,9	60	HP ²⁾	Speer	32,0	1.260	N320	0,29	4.4	391	1284	0,36
				N340	0,39	5.9	434	1425	0,46	7.1	522
4,6	71	FMJ ²⁾	Sierra	33,0	1.299	N340	0,36	5.5	410	1345	0,43
				3N37	0,39	6.0	412	1352	0,49	7.6	493
				3N38	0,53	8.1	471	1546	0,61	9.5	521
4,8	74	FMJ ¹⁾	Lapua	33,0	1.299	N340	0,35	5.5	406	1331	0,43
				3N37	0,39	5.9	403	1322	0,49	7.6	478
5,8	90	JHC ²⁾	Sierra	32,5	1.280	N340	0,29	4.5	308	1011	0,37
				3N37	0,34	5.2	340	1116	0,43	6.6	416
				3N38	0,46	7.1	404	1326	0,53	8.1	452
6,0	93	FMJ ¹⁾	Lapua	34,0	1.339	N340	0,31	4.7	342	1122	0,39
				3N37	0,33	5.1	349	1146	0,46	7.1	418
				3N38	0,43	6.6	378	1241	0,56	8.6	445
¹⁾ Bullet cal. 7,84 mm (0,309")				²⁾ Bullet cal. 7,92 mm (0,312")							

.32 S&W Long N.P.

Test barrel: 175 mm (7"), 1 in 18½" twist

Primers: Small Pistol

Cases: Lapua, trim-to length 23,20 mm (0.913")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]	
5,4	83	LWC	Lapua	24,6	0,969	N310	0,09	1.4	231	758	0,11
6,4	98	LWC	Lapua	24,6	0,969	N310	0,07	1.1	186	610	0,08
6,4	98	LRN	Lapua	32,3	1,272	N310	0,12	1.9	256	840	0,14

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.32 S&W Long Wadcutter

Test barrel: 150 mm (6"), 1 in 18¾" twist

Primers: Small Pistol

Cases: Lapua, trim-to length 23,20 mm (0.913")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]	
5,4	83	LWC	Lapua	24,6	0,969	N310	0,11	1.7	246	807	0,13
6,4	98	LWC	Lapua	24,6	0,969	N310	0,09	1.4	233	764	0,12

9 mm Luger

Test barrel: 100 mm (4"), 1 in 10" twist

Primers: Small Pistol

Cases: Lapua, trim-to length 19,00 mm (0.748")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]	
5,8	90	HP-XTP	Hornady	27,0	1,063	N310	0,26	3.9	369	1212	0,27
				N320	0,31	4.8	401	1316	0,34	5.3	421
				N330	0,36	5.6	420	1379	0,39	6.1	439
				N340	0,36	5.5	423	1387	0,40	6.2	452
				N350	0,42	6.4	424	1391	0,47	7.2	456
6,5	100	HP	Speer	27,5	1,083	N320	0,30	4.7	373	1222	0,33
				N330	0,35	5.4	393	1290	0,38	5.9	416
				N340	0,37	5.7	393	1290	0,42	6.4	429
				N350	0,42	6.4	398	1306	0,47	7.3	434
7,5	115	HP-XTP	Hornady	29,0	1,142	N320	0,26	4.0	341	1118	0,29
				N330	0,31	4.					

9 mm Luger

cont.

Bullet			Powder	Starting load			Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
8,0	124	Megashock	Lapua	28,7	N350	0,32	4.9	341	1119	0,37	5.7
					3N37	0,34	5.2	336	1102	0,40	6.2
					N320	0,23	3.5	273	896	0,27	4.2
					N330	0,27	4.2	299	981	0,32	4.9
					N340	0,28	4.3	299	981	0,32	4.9
					N350	0,33	5.1	321	1053	0,37	5.7
8,4	130	FMJ	Sierra	29,0	N350	0,34	5.2	334	1096	0,39	6.0
					3N37	0,34	5.2	334	1096	0,39	6.0
					N320	0,23	3.6	299	981	0,26	4.0
					N330	0,26	4.0	314	1031	0,29	4.5
					N340	0,28	4.4	325	1066	0,31	4.8
					N350	0,33	5.2	330	1083	0,36	5.5
9,4	145	LRN	Intercast	29,0	N350	0,32	4.9	325	1067	0,36	5.5
					3N37	0,32	4.9	325	1067	0,36	5.5
					N105	0,45	7.0	351	1151	0,48	7.4
					N320	0,22	3.5	285	935	0,25	3.8
					N330	0,25	3.9	299	982	0,28	4.3
					N340	0,25	3.9	299	982	0,28	4.3
9,5	147	HP/XTP	Hornady	29,0	N350	0,27	4.2	296	972	0,30	4.7
					3N37	0,29	4.5	299	982	0,32	5.0
					N320	0,20	3.1	239	784	0,25	3.9
					N330	0,25	3.9	294	964	0,28	4.3
					N340	0,25	3.9	289	948	0,28	4.3
					3N37	0,30	4.7	298	979	0,33	5.1
9,5	147	RN	Rainier	29,0	N350	0,29	4.5	302	991	0,32	5.0
					3N38	0,41	6.3	357	1171	0,45	6.9
					N105	0,40	6.1	317	1039	0,41	6.4
					N320	0,22	3.5	272	893	0,25	3.8
					N340	0,24	3.8	272	892	0,27	4.1
					N350	0,27	4.2	285	935	0,30	4.7
9,7	150	CEPP	Lapua	28,7	N350	0,29	4.5	286	937	0,32	4.9
					3N37	0,29	4.5	286	937	0,32	4.9
					N320	0,23	3.5	264	867	0,24	3.8
					N340	0,24	3.8	275	903	0,27	4.1
					N350	0,27	4.2	285	936	0,30	4.6
					3N37	0,27	4.2	275	904	0,30	4.7

9 x 21

Test barrel: 140 mm (5½"), 1 in 10" twist

Primers: Small Pistol

Cases: Tanfoglio, trim-to length 21,00 mm (0.826")

Bullet			Powder	Starting load			Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	[fps]	Weight [g]	Velocity [m/s]	[fps]
6,5	100	HP	Speer	29,0	N340	0,39	5.9	416	1363	0,43	6.6
					3N37	0,43	6.7	427	1400	0,48	7.4
					N350	0,46	7.0	433	1420	0,50	7.6
					3N37	0,39	5.9	375	1229	0,43	6.6
					N350	0,39	5.9	388	1274	0,43	6.6
					N105	0,53	8.1	410	1344	0,57	8.7
7,5	115	FMJ	Sierra	29,5	N340	0,35	5.3	381	1248	0,38	5.9
					3N37	0,39	5.9	375	1229	0,43	6.6
					N350	0,39	5.9	388	1274	0,43	6.6
					3N37	0,40	6.2	324	1063	0,46	7.1
					N38	0,49	7.6	383	1257	0,61	9.4
					N105	0,53	8.1	410	1344	0,57	8.7
7,5	115	FMJHP	Fiocchi	29,5	N340	0,35	5.3	313	1027	0,40	6.2
					3N37	0,40	6.2	324	1063	0,46	7.1
					N38	0,49	7.6	383	1257	0,61	9.4
					N105	0,45	6.9	372	1220	0,48	7.4
					N320	0,31	4.7	348	1142	0,34	5.2
					N350	0,35	5.3	354	1160	0,39	5.9
8,0	123	FMJ	Lapua	29,5	N350	0,35	5.3	348	1143	0,38	5.9
					3N37	0,35	4.9	330	1083	0,37	5.7
					N105	0,45	6.9	372	1220	0,48	7.4
					N320	0,31	4.7	348	1142	0,34	5.2
					N350	0,35	5.3	348	1143	0,38	5.9
					N105	0,45	6.9	372	1220	0,48	7.4
8,0	123	FMJTC	Fiocchi	29,5	N350	0,32	4.9	330	1083	0,37	5.7
					3N37	0,38	5.9	345	1132	0,43	6.6
					N38	0,46	7.1	353	1158	0,53	8.2
					N105	0,32	4.9	310	1016	0,34	5.3
					N320	0,30	4.6	324	1064	0,32	5.0
					N350	0,38	5.8	326	1071	0,41	6.3
9,5	147	HP-XTP	Hornady	29,5	N350	0,32	4.6	324	1064	0,32	5.0
					3N37	0,32	4.9	310	1016	0,34	5.3
					N105	0,38	5.8	326	1071	0,41	6.3
					N320	0,30	4.6	324	1064	0,32	5.0
					N350	0,38	5.8	326	1071	0,41	6.3

.38 Super Auto

cont.

Bullet			Powder		Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
8,0	124	LSWC	Intercast	32,0	N340	0,39	6,0	368	1207	0,43	6,6
					3N37	0,46	7,1	374	1227	0,48	7,4
					N350	0,41	6,3	366	1201	0,45	6,9
					N105	0,64	9,9	429	1407	0,67	10,4
					N320	0,26	4,0	334	1096	0,29	4,5
					N340	0,35	5,4	367	1204	0,38	5,9
					N350	0,39	6,0	371	1217	0,43	6,6
					3N37	0,41	6,3	377	1237	0,45	6,9
					N320	0,27	4,2	317	1040	0,30	4,6
					N330	0,32	4,9	323	1060	0,37	5,6
8,4	130	FMJ	Sierra	32,0	N340	0,36	5,6	349	1145	0,39	5,9
					3N37	0,41	6,3	360	1181	0,44	6,8
					N105	0,60	9,3	402	1319	0,63	9,6
					N320	0,29	4,5	312	1024	0,31	4,8
					N340	0,35	5,4	344	1129	0,38	5,8
					N350	0,38	5,9	347	1138	0,42	6,4
					3N37	0,41	6,3	355	1165	0,44	6,8
					N320	0,28	4,3	315	1033	0,31	4,7
					N340	0,36	5,6	329	1079	0,39	5,9
					N350	0,33	5,1	319	1047	0,36	5,6
8,4	130	RN	Rainier	32,0	N340	0,33	5,1	315	1033	0,36	5,5
					3N37	0,38	5,9	334	1096	0,41	6,3
					N350	0,37	5,7	327	1073	0,40	6,1
					N105	0,51	7,9	360	1181	0,53	8,2
					N320	0,32	4,9	321	1053	0,35	5,3
					N340	0,34	5,2	307	1007	0,37	5,7
					N350	0,36	5,6	316	1037	0,39	5,9
					3N37	0,36	5,6	316	1037	0,39	5,9
					N320	0,29	4,5	312	1024	0,31	4,8
					N340	0,35	5,4	344	1129	0,38	5,8
9,4	145	LRN	Intercast	32,0	N340	0,28	4,3	315	1033	0,31	4,7
					3N37	0,36	5,6	329	1079	0,39	5,9
					N350	0,33	5,1	319	1047	0,36	5,6
					N105	0,60	9,3	402	1319	0,63	9,6
					N320	0,29	4,5	312	1024	0,31	4,8
					N340	0,35	5,4	344	1129	0,38	5,8
					3N37	0,41	6,3	355	1165	0,44	6,8
					N320	0,28	4,3	315	1033	0,31	4,7
					N340	0,36	5,1	315	1033	0,36	5,5
					N350	0,37	5,7	327	1073	0,40	6,1
9,5	147	HP/XTP	Hornady	32,0	N340	0,33	5,1	315	1033	0,36	5,5
					3N37	0,38	5,9	334	1096	0,41	6,3
					N350	0,37	5,7	327	1073	0,40	6,1
					N105	0,51	7,9	360	1181	0,53	8,2
					N320	0,32	4,9	321	1053	0,35	5,3
					N340	0,34	5,2	307	1007	0,37	5,7
					N350	0,36	5,6	316	1037	0,39	5,9
					3N37	0,36	5,6	316	1037	0,39	5,9
					N320	0,29	4,5	312	1024	0,31	4,8
					N340	0,35	5,4	344	1129	0,38	5,8
9,5	147	RN	Rainier	32,0	N340	0,32	4,9	315	1033	0,36	5,5
					3N37	0,36	5,5	327	1073	0,39	5,9
					N350	0,34	5,2	307	1007	0,37	5,7
					N105	0,51	7,9	360	1181	0,53	8,2
					N320	0,32	4,9	321	1053	0,35	5,3
					N340	0,34	5,2	307	1007	0,37	5,7
					N350	0,36	5,6	316	1037	0,39	5,9
					3N37	0,36	5,6	316	1037	0,39	5,9
					N320	0,29	4,5	312	1024	0,31	4,8
					N340	0,35	5,4	344	1129	0,38	5,8

.38 Special

Test barrel: 170 mm (6½"), 1 in 18" twist

Primers: Small Pistol

Cases: Lapua, trim-to length 29,10 mm (1.146")

Bullet			Powder		Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
7,1	110	HP/XTP	Hornady	36,5	N340	0,35	5,4	342	1120	0,40	6,1
					3N37	0,40	6,2	345	1130	0,45	6,9
					N350	0,43	6,6	355	1165	0,50	7,7
					N105	0,60	9,3	402	1319	0,63	9,6
					N320	0,29	4,5	310	1015	0,34	5,2
					N340	0,37	5,7	324	1063	0,42	6,4
					3N37	0,41	6,3	329	1079	0,46	7,0
					N350	0,39	5,9	336	1101	0,44	6,8
					N105	0,51	7,9	360	1181	0,53	8,2
					N320	0,32	4,9	321	1053	0,35	5,3
8,0	124	LSWC	Intercast	36,5	N340	0,29	4,5	310	1015	0,34	5,2
					3N37	0,36	5,5	327	1073</td		

.357 Magnum

cont.

Bullet			Powder										Starting load			Maximum load		
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]				
10,3	158	LSWC/HP		40,0	1.575	N330 ¹⁾	0,25	3.9	241	791	0,32	5.0	304	997				
						N340 ¹⁾	0,29	4.5	245	804	0,38	5.9	320	1050				
10,4	160	LFN	Intercast	40,0	1.575	N340	0,45	6.9	376	1234	0,48	7.4	389	1276				
						N337	0,51	7.9	383	1257	0,54	8.4	403	1321				
						N350	0,48	7.4	383	1257	0,52	8.1	399	1309				
						N110	0,92	14.2	456	1496	0,97	15.0	478	1570				
11,7	180	TMJ	Speer	42,6 ¹⁾	1.677	N340	0,45	6.9	321	1053	0,48	7.4	341	1118				
						N337	0,50	7.7	336	1102	0,54	8.3	358	1174				
						N350	0,47	7.3	325	1066	0,51	7.9	351	1150				
						N105	0,65	10.0	379	1243	0,71	10.9	401	1315				
						N110	0,82	12.7	382	1253	0,91F	14.0F	425	1394				
13,0	200	TMJ	Speer	43,1 ¹⁾	1.697	N337	0,46	7.1	297	974	0,50	7.7	317	1041				
						N350	0,45	6.9	288	945	0,49	7.7	314	1031				
						N105	0,60	9.3	337	1106	0,64	10.2	358	1174				
						N110	0,79	12.2	362	1188	0,83	12.8	382	1252				

F = Case full

¹⁾ The cartridge overall length exceeds the CIP maximum.¹⁾ Cowboy Action Shooting load**.357 Remington Maximum**

Testbarrel: 300 mm (12"), 1 in 18½" twist

Primers: Small Rifle

Cases: Remington, trim-to length 40,60 mm (1.598")

Bullet			Powder										Starting load			Maximum load		
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]				
10,2	158	FP/XTP	Hornady	48,0	1.890	N337	0,70	10.8	461	1512	0,74	11.3	478	1568				
						N350	0,64	9.9	443	1453	0,71	10.9	470	1541				
						N105	0,85	13.1	485	1591	0,92	14.3	513	1683				
						N110	1,21	18.7	557	1827	1,27	19.5	578	1898				
10,2	158	FP	Rainier	48,0	1.890	N350	0,71	11.0	440	1444	0,78	12.0	472	1548				
						N337	0,69	10.6	445	1460	0,75	11.5	473	1552				
						N105	0,86	13.3	490	1608	0,94	14.5	517	1695				
						N110	1,27	19.6	559	1834	1,32	20.3	581	1907				
10,4	160	LFN	Intercast	48,0	1.890	N337	0,66	10.2	465	1526	0,72	11.1	482	1580				
						N350	0,66	10.2	459	1506	0,70	10.7	473	1553				
						N105	0,87	13.4	517	1696	0,95	14.6	541	1775				
11,7	180	Silhouette	Nosler	48,1	1.894	N105	0,79	12.2	443	1453	0,85	13.1	468	1534				
						N110	1,07	16.5	500	1640	1,12	17.3	519	1704				
						N120	1,40	21.6	516	1693	1,46	22.5	537	1762				
13,0	200	TMJ	Speer	50,8 ¹⁾	2.000	N110	0,99	15.3	440	1444	1,04	16.1	460	1508				
						N120	1,30	20.1	458	1503	1,36	20.9	483	1584				

¹⁾ The cartridge overall length exceeds the CIP maximum.**.40 S&W**

Testbarrel: 140 mm (5½"), 1 in 16" twist

Primers: Small Pistol

Cases: Remington, trim-to length 21,40 mm (0.843")

Bullet			Powder										Starting load			Maximum load		
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]				
8,7	135	HP-XTP	Hornady	28,6	1.126	N320	0,34	5.2	337	1106	0,35	5.5	346	1134				
						N330	0,39	6.0	348	1142	0,40	6.2	357	1172				
						N340	0,39	6.0	345	1132	0,41	6.3	357	1171				
						3N37	0,47	7.3	357	1171	0,49	7.6	369	1210				
						N350	0,43	6.6	351	1152	0,45	7.0	362	1189				
8,7	135	HP	Nosler	28,6	1.126	N320	0,39	6.0	373	1224	0,40	6.2	384	1259				
						N340	0,48	7.4	403	1322	0,50	7.8	416	1364				
						3N37	0,54	8.3	403	1322	0,56	8.6	417	1367				
10,0	155	FP	Rainier	28,6	1.126	N320	0,34	5.2	331	1086	0,35	5.5	340	1114				
						N330	0,39	6.0	344	1129	0,40	6.2	354	1160				
						N340	0,41	6.3	352	1155	0,43	6.6	364	1195				
						N350	0,46	7.1	357	1171	0,48	7.4	370	1213				

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.40 S & W

cont.

Bullet			Powder										Starting load			Maximum load		
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	[grs]	Velocity [m/s]	[fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]				
10,7	165	TC-FMJ	PMC	28,6	1.126	3N37	0,49	7.6	359	1178	0,51	7.9	371	1216				
						N340	0,32	4.9	303	994	0,34	5.2	316	1038				
						3N37	0,41	6.3	334	1096	0,43							

.44 S&W Special

Test barrel: 150 mm (6"), 1 in 18" twist
 Primers: Large Pistol
 Cases: Remington, trim-to length 29,30 mm (1.153")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]	
11,7	180	HP-XTP	Hornady	37,3	1.469	N320	0,44	6.8	285	935	0,49	7.6	315	1033
						N330	0,50	7.7	308	1010	0,56	8.6	338	1109
						N340	0,57	8.8	319	1047	0,62	9.6	349	1145
						N350	0,64	9.9	318	1043	0,68	10.5	350	1148
13,0	200	HP-XTP	Hornady	37,3	1.469	N320	0,41	6.3	270	886	0,45	6.9	294	965
						N330	0,50	7.7	287	942	0,55	8.5	315	1033
						N340	0,54	8.3	293	961	0,59	9.1	325	1066
						N350	0,59	9.1	296	971	0,64	9.9	329	1079
14,3	220	FPJ-Match	Sierra	37,3	1.469	N320	0,34	5.2	221	725	0,39	6.0	255	837
						N330	0,40	6.2	232	761	0,46	7.1	271	889
						N340	0,43	6.6	248	814	0,48	7.4	278	912
						N350	0,50	7.7	254	833	0,56	8.6	289	948
15,6	240	JTC-Sil	Hornady	37,6	1.480	N320	0,31	4.8	193	633	0,36	5.6	223	732
						N330	0,35	5.4	206	676	0,40	6.2	234	768
						N340	0,41	6.3	222	728	0,46	7.1	252	827
						N350	0,49	7.6	239	784	0,53	8.2	271	889
15,6	240	SWC/HP		39,1	1.539	N320 ¹⁾	0,30	4.7	214	702	0,38	5.9	260	853
						N330 ¹⁾	0,36	5.5	229	751	0,41	6.3	270	886
16,1	248	LRNFP	Gunhill	37,2	1.465	N32C ¹⁾	0,38	5.9	238	781	0,41	6.3	255	837
16,2	250	FPJ	Sierra	37,3	1.469	N320	0,31	4.8	193	633	0,36	5.6	226	741
						N330	0,32	4.9	191	627	0,39	6.0	228	748
						N340	0,36	5.6	197	646	0,42	6.5	237	778
						N350	0,44	6.8	229	751	0,49	7.6	260	853
17,3	267	LFN	Intercast	39,1	1.539	N320	0,34	5.2	242	794	0,39	6.0	262	860
						N330	0,41	6.3	261	856	0,45	6.9	281	922
						N340	0,42	6.5	256	840	0,46	7.1	278	912
						N350	0,47	7.3	259	850	0,52	8.0	282	925
17,3	267	LFN		39,1	1.539	N320 ¹⁾	0,25	3.8	193	633	0,34	5.3	242	794
						N330 ¹⁾	0,32	4.9	216	709	0,38	5.9	254	833
						N340 ¹⁾	0,43	6.6	261	856	0,47	7.3	282	925

¹⁾ Cowboy Action Shooting load

.44 Remington Magnum

Test barrel: 175 mm (7"), 1 in 20" twist
 Primers: Large Pistol
 Cases: Remington, trim-to length 32,40 mm (1.275")

Bullet				Powder	Starting load			Maximum load						
Weight [g]	[grs]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	[grs]	Velocity [m/s]	[fps]	
11,7	180	HP-XTP	Hornady	40,7	1.602	N320	0,69	10.6	407	1335	0,77	11.8	437	1432
						N340	0,84	13.0	439	1440	0,92	14.1	472	1549
						N350	0,89	13.7	448	1470	0,99	15.3	481	1578
						N105	1,23	19.0	498	1634	1,40	21.6	543	1781
						N110	1,63	25.2	492	1614	1,76	27.1	534	1751
13,0	200	HP-XTP	Hornady	40,7	1.602	N320	0,65	10.0	381	1250	0,73	11.3	408	1339
						N340	0,76	11.7	410	1345	0,84	13.0	437	1434
						3N37	0,89	13.7	433	1421	0,98	15.2	462	1515
						N350	0,83	12.8	416	1365	0,95	14.6	453	1487
						N105	1,09	16.8	459	1506	1,26	19.4	500	1642
						N110	1,58	24.4	494	1621	1,71	26.3	530	1740
14,3	220	FPJ-Match	Sierra	40,7	1.602	N320	0,59	9.1	350	1148	0,67	10.4	375	1232
						N340	0,72	11.1	381	1250	0,80	12.3	405	1328
						N350	0,83	12.8	402	1319	0,96	14.8	439	1441
						N105	1,08	16.7	432	1417	1,22	18.8	470	1542
15,6	240	JTC-Sil	Hornady	40,7	1.602	N320	0,58	8.9	331	1086	0,63	9.7	354	1161
						N340	0,67	10.3	358	1175	0,75	11.5	380	1247
						3N37	0,78	12.0	372	1220	0,86	13.3	402	1318

LIGHT GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.44 Remington Magnum

cont.

Bullet	Powder	Starting load		Maximum load	
Weight [g]	Type	Weight [g]	Velocity [m/s]	Weight [g]	Velocity [m/s]
	N350	0,77	11.9	375	1230
	N105	0,95	14.7	404	1325
	N110	1,32	20.4	435	1427
16,1	248	LRNFP	Gunhill	1,594	1,43
16,2	250	FPJ-Match	Sierra	1,602	2,11
				3N20	3,70
				N340	5,95
				N350	7,35
				N105	11,20
				N110	12,70
				N105	13,10
				N350	13,95
				N105	14,70
				N350	15,41
				N105	16,60
				N350	17,43
				N105	18,70
				N350	19,10
				N105	20,40
				N350	21,20
				N105	22,11
				N350	23,00
				N105	24,30
				N350	25,60
				N105	27,00
				N350	28,30
				N105	29,60
				N350	30,93
				N105	32,11
				N350	33,30
				N105	34,50
				N350	35,70
				N105	37,00
				N350	38,20
				N105	39,40
				N350	40,60
				N105	41,80
				N350	43,00
				N105	44,20
				N350	45,40
				N105	46,60
				N350	47,80
				N105	49,00
				N350	50,20
				N105	51,40
				N350</	

.45 Colt

Test barrel: 150 mm (6"), 1 in 16" twist
 Primers: Large Pistol
 Cases: Remington, trim-to length 32,50 mm (1.279")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
11,7	180	LSCW	Intercast	40,5	1,594	N320	0,55	8,6	341	1119
						N330	0,66	10,1	362	1188
						N340	0,69	10,7	362	1188
						N350	0,75	11,6	363	1191
12,0	185	HP/XTP	Hornady	40,5	1,594	N320	0,57	8,7	334	1096
						N340	0,71	10,9	342	1122
						N350	0,80	12,3	346	1135
12,0	185	FN	Rainier	40,5	1,594	N320	0,57	8,9	328	1076
						N330	0,67	10,4	333	1093
						N340	0,72	11,1	343	1125
						N350	0,80	12,3	346	1135
13,0	200	FMJ-CT	Hornady	40,5	1,594	N320	0,52	8,1	317	1040
13,0	200	LSCW	Hornady	40,5	1,594	N320	0,56	8,7	326	1070
						N340	0,70	10,9	341	1119
13,0	200	LRN		40,5	1,594	N320 ¹⁾	0,44	6,8	259	850
						N330 ¹⁾	0,52	8,0	267	876
14,9	230	FMJ-Match	Sierra	40,5	1,594	N320	0,49	7,5	286	938
						N340	0,63	9,7	301	988
16,2	250	HP-XTP	Hornady	40,5	1,594	N320	0,47	7,3	257	843
						N340	0,60	9,2	281	922
						N350	0,69	10,7	297	974
						N105	0,91	14,1	296	971
16,2	250	LRN		40,5	1,594	N320 ¹⁾	0,36	5,6	229	751
						N330 ¹⁾	0,41	6,3	238	781
16,3	251	LRNFP	Gunhill	40,3	1,587	N32C ¹⁾	0,54	8,3	271	889

¹⁾ Cowboy Action Shooting load

.45 Winchester Magnum

Test barrel: 300 mm (12"), 1 in 16" twist
 Primers: Large Pistol
 Cases: Winchester, trim-to length 30,30 mm (1.192")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
12,0	185	HP/XTP	Hornady	38,5	1,516	N350	0,81	12,5	451	1478
						N337	0,91	14,0	507	1662
						N105	1,13	17,4	523	1714
13,0	200	TMJ-SWC	Speer	38,5	1,516	N337	0,91	14,0	487	1598
13,0	200	FMJ-CT	Hornady	39,5	1,555	N105	1,07	16,5	483	1583
13,0	200	TMJ-SWC	Speer	38,5	1,516	N110	1,49	22,9	528	1731
14,9	230	FMJ-RN	Hornady	39,5	1,555	N337	0,82	12,7	410	1344
						N110	1,41	21,8	495	1622
16,2	250	HP-XTP	Hornady	38,2	1,504	N350	0,65	10,0	309	1014
						N337	0,75	11,6	354	1160
						N105	0,90	13,8	393	1289
						N110	1,20	18,4	442	1448

.454 Casull

Test barrel: 240 mm (9½"), 1 in 24" twist
 Primers: Small Rifle
 Cases: Freedom Arms, trim-to length 33,30 mm (1.311")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
12,0	185	HP/XTP	Hornady ¹⁾	41,7	1,642	N337	1,14	17,6	531	1742
						N350	1,18	18,2	537	1762

.454 Casull

cont.

Bullet		Powder	Starting load			Maximum load				
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]		
14,6	225	HP	Speer	42,7	1,681	3N37	1,09	16,8	474	1555
						N105	1,59	24,5	536	1759
						N110	2,00	30,9	566	1857
16,2	250	HP/XTP	Hornady	42,8	1,685	3N37	1,01	15,6	437	1434
						N105	1,39	21,4	481	1578
						N110	1,82	28,1	523	1716
19,4	300	Plated HP	Speer	44,5	1,752	3N37	0,99	15,3	396	1299
						N105	1,28	19,8	431	1414
						N110	1,71	26,4	474	1555

¹⁾ The crimping is done over the bullet ogive.

.50 AE

Test barrel: 150 mm (6"), 1 in 19" twist

Primers: Large Pistol

Cases: Speer, trim-to length 32,50 mm (1.280")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
19,4	300	JHP	IMI	40,0	1,575	N105	1,26	19,4	395	1296	1,38
						N110	1,64	25,3	396	1299	1,86
21,1	325	UCHP	Speer	40,0	1,575	N105	1,15	17,7	357	1171	1,26
						N110	1,56	24,1	386	1266	1,75
						N120	1,99	30,7	348	1142	2,23

.500 S&W Magnum

Test barrel: 280 mm (11"), 1 in 18" twist

Primers: Large Rifle

Cases: Starline, trim-to length 41,00 mm (1.614")

Bullet				Powder	Starting load			Maximum load			
Weight [g]	Type/Name	Mfg	C.O.L. [mm]	[in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
19,4	300	TMJ	Speer	51,0	2,008	3N38	1,90	29,3	535	1755	2,20
						N105	1,98	30,6	536	1759	2,33
						N110	2,59	40,0	570	1870	2,95
22,7	350	HP/XTP	Hornady	50,4	1,984	3N38	1,64	25,3	468	1535	2,00
						N105	1,75	27,0	487	1598	2,02
						N110	2,19	33,8	521	1709	2,51
						N120	2,76</td				

Vihtavuori Smokeless Loads for Cowboy Action Shooting

About the Data

These loads are developed to give the velocities required for the cowboy action shooting using revolvers with lead bullets. The maximum load is determined by the velocity limit about 300 m/s, or by the maximum pressure limit according to the CIP October 1, 1992 rules. The bold text in the tables indicate the maximum load according to CIP pressure level. The maximum loads must never be exceeded.

All the listed loads are intended to be used in modern firearms, which are according to the SAAMI requirements. Please use a competent gunsmith to evaluate that the condition of your gun is adequate to be used with the pressures indicated in the tables. The starting loads are the lowest charges which appeared to give clean burning, i.e. no unburned residues in the barrel or in the case, in our test shooting. This limit may, however vary according to the revolver used.

There are some special features, which must be considered, when using reduced loads like the ones presented in the tables below. The same facts are equally valid always when using any smokeless powder in such loads.

1) Double charges

Some of these loads are so small that throwing the load twice in the same case is possible because of the large case volume. Doubling the charge accidentally causes most probably truly lethal chamber pressures. Therefore, it is a must for everyone using this data to check visually every single load for the double charge before seating the bullet.

2) Free space in the case

When using charges which leave large amount of free space in the case, the shooting characteristics may vary largely depending on where the powder is located in the case. If the powder lies totally in the bottom of the case (i.e. in the end where primer is), the muzzle velocity and especially the maximum pressure become much higher. The maximum pressure may even be doubled when same powder charge is moved from the bullet end to the primer end of the case. This can simply be demonstrated by shaking the revolver barrel upwards or barrel downwards just before turning it smoothly in horizontal position, aiming and shooting. Also the recoil may transfer the

Warnings

Smokeless powder differs considerably in its burning characteristics from common "black powder". Black powder burns essentially at the same rate in the open (unconfined) as when in a gun. The burning rate of smokeless powder increases with increasing pressure. If burning smokeless powder is confined, gas pressure will rise and eventually can cause the container or chamber to burst. A slight increase in smokeless powder charge after maximum load causes sharp increase in maximum pressure in the chamber. **Never exceed the maximum loads.**

.38 Special

Test barrel: 125 mm (5"), 1 in 18" twist
 Primers: Small Pistol
 Cases: Remington, trim-to length 29,10 mm (1.146")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm] [in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
9,4	145	LSWC	37,5 1.476	N32C	0,32	4.9	307	1007	0,37	5.7
10,2	158	FNCM	36,7 1.445	N32C	0,27	4.2	261	856	0,36	5.6
10,3	158	LSWC/HP	36,5 1.437	N320	0,21	3.3	230	755	0,25	3.8
				N330	0,23	3.6	240	787	0,27	4.1
										269 883

.357 Magnum

Test barrel: 150 mm (6"), 1 in 18½" twist
 Primers: Small Rifle
 Cases: Remington, trim-to length 32,60 mm (1.283")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm] [in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
10,2	158	FNCM	40,2 1.583	N32C	0,29	4.5	265	869	0,37	5.7
10,3	158	LSWC/HP	40,0 1.575	N330	0,25	3.9	241	791	0,32	5.0
				N340	0,29	4.5	245	804	0,38	5.9
										320 1050

.44 S&W Special

Test barrel: 165 mm (6½"), 1 in 18" twist
 Primers: Large Pistol
 Cases: Remington, trim-to length 29,30 mm (1.153")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm] [in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
15,6	240	SWC/HP	39,1 1.539	N320	0,30	4.7	214	702	0,38	5.9
				N330	0,36	5.5	229	751	0,41	6.3
16,1	248	LRNFP	37,2 1.465	N32C	0,38	5.9	238	781	0,41	6.3
17,3	267	LFN	39,1 1.539	N320	0,25	3.8	193	633	0,34	5.3
				N330	0,32	4.9	216	709	0,38	5.9
				N340	0,43	6.6	261	856	0,47	7.3
										282 925

.44 Remington Magnum

Test barrel: 175 mm (7"), 1 in 20" twist
 Primers: Large Pistol
 Cases: Remington, trim-to length 32,40 mm (1.276")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm] [in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
16,1	248	LRNFP	40,5 1.594	N32C	0,49	7.6	272	892	0,62	9.6
17,3	267	LFN	40,0 1.575	N340	0,38	5.9	224	735	0,49	7.5
17,3	267	LSWC	40,5 1.681	N32C	0,50	7.7	271	889	0,60	9.3
										301 988

.45 Colt

Test barrel: 150 mm (6"), 1 in 16" twist
 Primers: Large Pistol
 Cases: Remington, trim-to length 32,50 mm (1.280")

Bullet				Powder	Starting load			Maximum load		
Weight [g]	Type/Name	Mfg	C.O.L. [mm] [in.]	Type	Weight [g]	Velocity [m/s]	Velocity [fps]	Weight [g]	Velocity [m/s]	Velocity [fps]
13,0	200	LRN	40,5 1.594	N320	0,44	6.8	259	850	0,56	8.7
				N330	0,52	8.0	267	876	0,56	8.6
16,2	250	LRN	40,5 1.594	N320	0,36	5.6	229	751	0,45	6.9
16,3	251	LRNFP	40,3 1.587	N32C	0,54	8.3	271	889	0,62	9.6
										305 1001

Personal Loads

Personal Loads



Quality by design

Manufacturing propellants entirely in-house ensures their high quality. All Vihtavuori powders are made using nitro-cellulose produced by cotton linters at our own plant. Premium quality Vihtavuori powders deliver consistently flawless firing performance – for you this means reliable reloading and ammunition you demand.

Each stage of the production process is subject to stringent quality control by the Vihtavuori experts to ensure that each production lot has the exact ballistic performance required. Each and every batch produced is inspected by comparing them to selected reference batches.

All Vihtavuori powders for small arms are extruded propellants. Propellant kernels are perforated cylinders of various sizes, flat ribbon flakes or other shapes extruded for special applications. The grain geometry of different powder types provides the wanted combustion characteristics for the chosen cartridge application.

The estimated shelf-life of Vihtavuori powders is a minimum of 10 years, if stored and sealed in its original containers at a temperature circa 20°C and relative humidity of 55 -65%.

All Vihtavuori reloading powders are packed into bottles and canisters and further in fiberboard boxes.

Experienced craftsmanship for the perfect ammo

For over 90 years, Vihtavuori has been known for producing high quality propellants with reliable ballistic performance, long shelf-life and wide variety selection. All of our powders meet the strict requirements of both civilian and military needs.

Vihtavuori powders come in three different series: N100 offers traditional single base propellants for rifle calibers, N300/3N offers porous single base powders and precise measuring capability for pistol cartridges, rimfire ammunition and shotgun shells, and N500 series powders are special high energy rifle propellants enhanced with nitroglycerin for extra ballistic performance.

Vihtavuori N100 Reloading Powders for Rifles

	N110	N120	N130	N133	N135	N140	N150	N160	N165	N170	24N41	20N29
Bulk density (g/l)	800	860	870	870	870	910	910	920	920	960	970	960
Energy content (J/g)	3950	3700	3750	3600	3550	3700	3750	3650	3500	3700	3700	3600

Relative burning rate of powder types mentioned above decreases from left to right.

Vihtavuori N300 Reloading Powders for Handguns

	N310	N320	N32C	N330	N340	N350	3N37	3N38	N105
Bulk density (g/l)	560	550	420	620	620	660	720	730	730
Energy content (J/g)	4100	4100	3050	4100	4100	4100	4100	4000	3950

Relative burning rate of powder types mentioned above decreases from left to right.

Vihtavuori N500 High Energy Reloading Powders for Rifles

	N530	N540	N550	N560	N570
Bulk density (g/l)	930	940	940	960	960
Energy content (J/g)	3950	4000	3900	4000	4000

Relative burning rate of powder types mentioned above decreases from left to right.

Consumer Package Information

Reloading Powder types	Consumer package, bottle 1,2 ltr (73.2 in ³) Measures: sides & height 95 x 75 x 226 mm	
N110, N120, N130, N133, N135, N140, N150, N160, N165, N170	net weight	gross weight
24N41, 20N29, N530, N540, N550, N560, N570	1,0 kg	1,1 kg
N310, N320, N32C, N330, N340, N350, 3N37, 3N38, N105	1,0 kg	1,1 kg
	0,5 kg	0,6 kg

Package information concerning 1,2 ltr (73.2 in³) bottles with 1,0 kg and 0,5 kg of powders mentioned above.

Reloading Powder types	Consumer package, canister 4,5 ltr (274.6 in ³) Measures: sides & height 135 x 189 x 260 mm	
N110, N140, N150, N160	net weight	gross weight
N310, N320, N340, 3N37, 3N38	3,5 kg	3,7 kg
	2,0 kg	2,2 kg


Package information concerning 4,5 ltr (274.6 in³) canisters with 3,5 kg of powders mentioned above and respectively with 2,0 kg of powders mentioned above.

All Vihtavuori reloading powders are packed into bottles and canisters and further in fiberboard boxes.



Vihtavuori mobile application!

This Edition of the Vihtavuori Reloading Guide is also available on www.vihtavuori.com - check also Apple **App Store** and **Google Play** store for the updated free of charge Vihtavuori RELOAD mobile app! Latest reloading information and the possibility to save your own reloading recipes, at hand everywhere you go. Reloading data now available also offline!

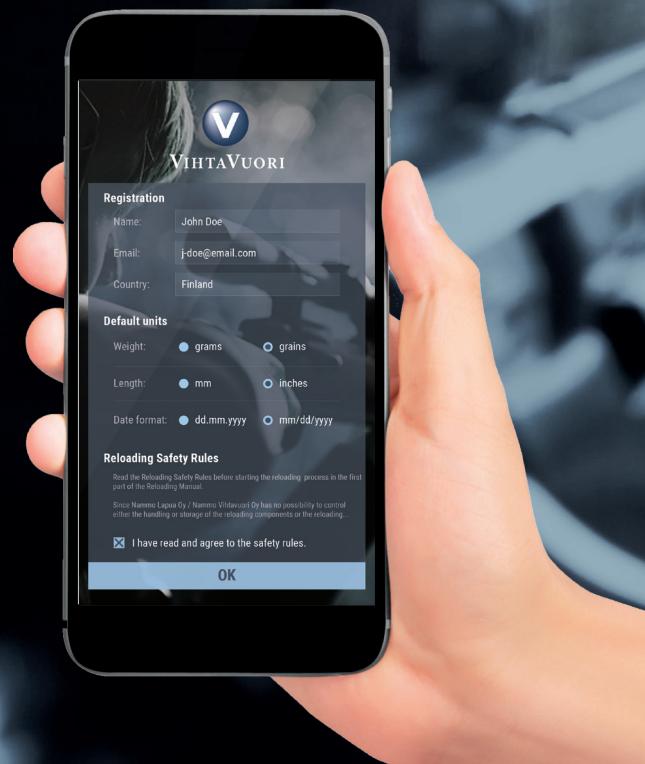

PS. Go like Vihtavuori Powders - now on Facebook and YouTube!

CUSTOMER SERVICE

Nammo Lapua Oy
P.O. Box 5 FI-62101 LAPUA
Finland

Tel. +358 10 523 3800
Fax +358 6 431 0244
www.vihtavuori.com



Part of Nammo Group